

**PREMIER
PAVERS**

*Distinctive Driveways
and Patios*


ITALIA RANGE

Transform your home with beautiful paving indoors & outdoors



20052025

MILANO | 600 X 600 | SANDSTONE #7

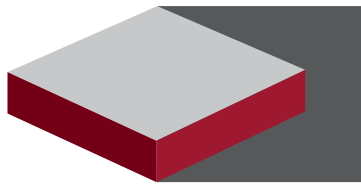

PREMIER PAVERS

*Distinctive Driveways
and Patios*

THANK YOU!
FOR CHOOSING PREMIER PAVERS!

At Premier Pavers, we are dedicated to making your paver selection process a very happy & enjoyable experience! From our top quality & timeless products, to our lovely team of people, we are sure that you will be absolutely delighted with your choice!

Thanks again!
From the team at
Premier Group New Zealand

Important note: Please visit our website for the very latest / up to date information.



Testimonials from our delighted customers

" I was looking for Pavers. I had seen what I liked so with a bit of kiwi know how went straight to the source, Premier Pavers. There was no looking back. It was the best decision I have made. I got a great product and a great job done. I have the look I wanted thanks to Premier Pavers. I would recommend them to anyone wanting great quality and detail. I'm certainly a satisfied customer. "

Leigh / Homeowner

" After all the positive experience we have had with the Premier Pavers group, OuterLife has no issues whatsoever in highly recommending them. On top of an excellent, economical product, they also present with top notch service and go out of their way to ensure that your expectations are both met and surpassed. "

Aaron Shirriffs / Director of Outerlife Landscapes from Palmerston North

" The paving job is complete and looks fantastic. The owner agrees – the most important feedback... Your service was 10/10. Product was also great – out of the 60 pavers, 1 paver had a hairline crack through one third and another had a smaller hairline crack. I was able to use those two for the pavers I had to cut. Delivery was also 10/10... I would recommend the purchase of your pavers to others. "

Selwyn – Landscaper

" The best value for money paving in NZ- extremely durable, very safe and very low maintenance. "

Doug Walker / Pave Direct Ltd

" The quality of Premier pavers is the best that I have come across. They certainly make my job of laying pavers easier due to how well they are constructed, and the service Premier provides is outstanding! "

Chris / Landscaper

" We are delighted with our beautiful new patio at our home. Thank you for your excellent service, quality of product and installation work provided by your recommended installer, Prestige Pavers. It has been a pleasure to deal with Premier Pavers all through this small but important project. "

Colin & Sheila – Homeowners





Case Study Winery Paving

Poppies Winery in Martinborough

Product Used: Premier Milano Paver 600×300 in Desert Dusk colour

“ Poppies Martinborough is a new boutique wine producer in the heart of Martinborough’s beautiful landscape and vineyards. The home for the wines was developed with the vision and romanticism of an old French wine cellar and courtyard; both visually intriguing and relaxing. The seductive nature of the vineyard needed to be bound with the building and the landscape, so a lot of importance was put on the visual aesthetics to ensure this new building had an old world feel.

The courtyard areas needed to be durable to a commercial standard yet look inviting and elegant. This came down to the choice of pavers and the colour needed to create the right ambience. After in-depth research was carried out with many different companies and products, the Premier Milano 600×300 pavers in Desert Dusk colour were decided on.

To put it simply, the result is “fantastic”. Premier Group have delivered something special and I am seriously grateful.

Great company to deal with, great product! ”




11 REASONS TO CHOOSE PREMIER PAVERS...

1. 10 YEAR WARRANTY*
2. APPROVED INSTALLERS AVAILABLE
3. DIRECT TO SITE DELIVERY AVAILABLE
4. HIGHLY DURABLE
5. SLIP RESISTANCE
6. VERY LOW MAINTENANCE
7. TIMELESS BEAUTY
8. SPECIAL GROUT TO PREVENT WEEDS & ANTS
9. SPECIAL SEALER TO PREVENT STAINS & FADING

10. EASY TO INSTALL

11. MADE IN NEW ZEALAND

* Terms and conditions apply. See website for details.

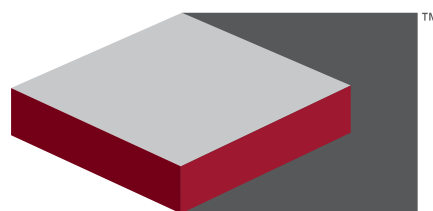

PREMIER PAVERS

*Distinctive Driveways
and Patios*

LET THE GOOD TIMES ROLL!...

- ✓ BBQs
- ✓ ENTERTAINING
- ✓ FAMILY TIME
- ✓ RELAXING

6 HOW TO ORDER YOUR PREMIER PRODUCTS

OPTION 1:

Order through your local DIY store – check on www.premier-group.co.nz for your nearest store. To ensure your order gets through to Premier Group Head Office quickly, you can also email us a copy of your store receipt to sales@premier-group.co.nz. DON'T FORGET to order all the add on products that you require e.g grout, sealer etc..

OPTION 2:

Contact us at Premier Group on freephone 0800 22 22 98 or sales@premier-group.co.nz so we can help you through the ordering process. We can help find you your nearest DIY store and the best contact person in that store etc...

FAQs

FREQUENTLY ASKED QUESTIONS

Q WHAT IS DELIVERY LEAD TIME?

A For stocked items, please allow 2-3 days. For non stocked items, please allow at least 4 weeks curing time.

Q WHERE CAN I SEE A SAMPLE?

A We can courier small samples to you. Please narrow down your decision to 2-3 products. We highly recommend that you visit your nearest DIY stores to view displays. These are mostly located at the garden centre end of the store and look like the image below.

Q DO YOU HAVE SHOWROOMS OR DISPLAYS?

A YES. Our products are displayed and stocked in all reputable DIY stores NZ wide.



Beautify your world...

Q DO YOU HAVE APPROVED INSTALLERS?

A YES. Please contact us on 0800 22 22 98 or sales@premier-group.co.nz for an installer in your area. See also page 8.

Q DO YOU DELIVER DIRECT TO SITE?

A YES we do. Please contact us for a price 0800 22 22 98 or sales@premier-group.co.nz or ask for a price at your local DIY store.

Q HOW MUCH DOES FREIGHT COST?

A All products are delivered FREE to the DIY stores NZ wide. If you require delivery to your site, please contact your DIY store or us for a price.

Q WHAT GUARANTEE DO YOU OFFER?

A Most products come with a 10 or 20 year warranty. Please see warranty page for more detail. Please contact us if unsure.

Q WILL I NEED TO SEAL MY PAVERS?

A We highly recommend that you seal your pavers. This will help prevent stains and wear and tear.

Q I WANT TO INSTALL MYSELF, WHERE DO I START?

A Planning and preparation is vital. Please begin by filling in the Landscape Planner (ask us for a copy), then order your Premier products.

From there we recommend that you follow the DIY instructions in this brochure and study the DIY videos on our website www.premier-group.co.nz.


Some projects will require the services of a professional e.g Hire a bricklayer to install your Premier Brick cladding/veneer for your new home.

Q WHERE CAN I VIEW PREMIER BRICKS?

A Please contact us for a list of house addresses so you can drive by to see them insitu! We can also courier samples to you.

Q HOW DO I OBTAIN A QUOTE FOR PRODUCTS AND/OR INSTALLATION?

A Please phone us on 0800 22 22 98 or email sales@premier-group.co.nz with your requirements and we can help you, hassle free. Our friendly customer service team can help you by phone or email with quotes, advice, approved installers, guidance to your nearest display etc...

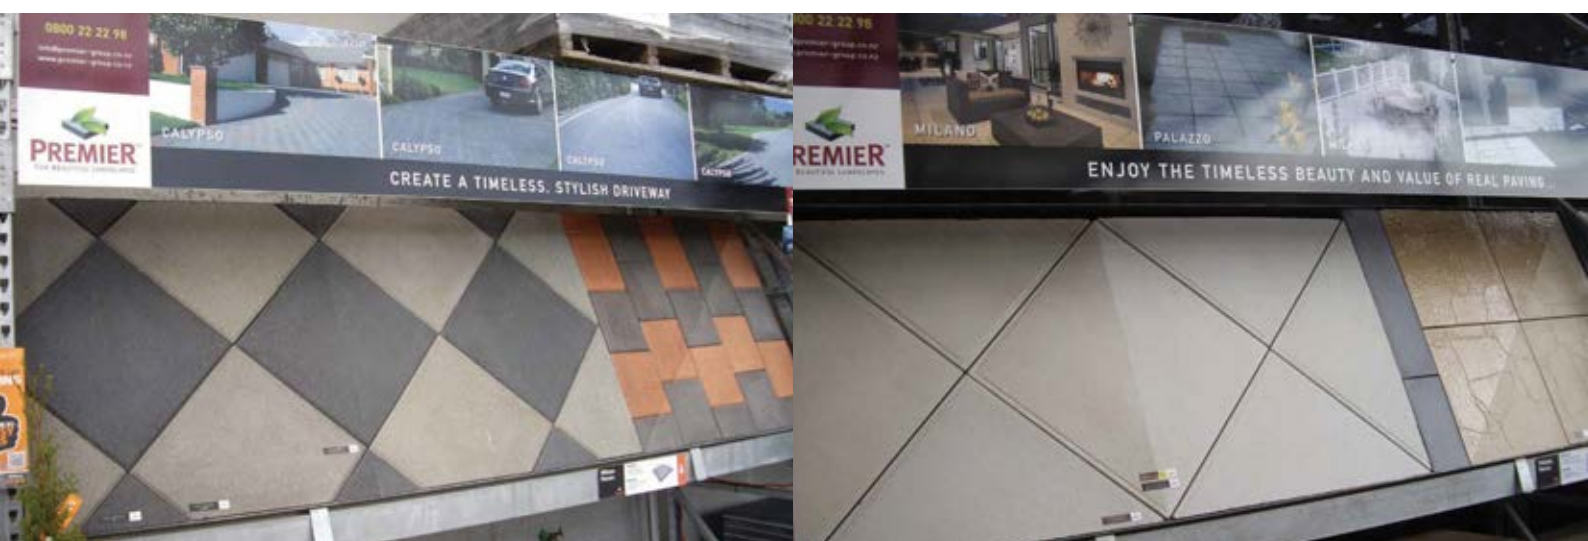



If you're managing your own project, the last thing you want is for inept workmanship to turn your dream garden or driveway into a complete nightmare. Don't worry! Help is at hand from Premier.

We can recommend reliable local installers for you to contact.

Professionalism and peace of mind!

The Premier register of approved Landscape Contractors and Driveway Installers is a national network of highly reputable professionals. Although they are not employed by Premier, they abide by our own strict Code of Installation Practice and are all vetted by assessors. In this way, we make sure your garden or driveway is installed properly, with great attention paid to minimising mess and disruption, so you get a beautiful, long lasting job.

Reassurance

When you use a register member you can be sure of receiving:

- Written confirmation of any quotation
- An estimated start date
- A reliable estimate of the time required to do the job
- The opportunity to take the Hard Landscaping Guarantee.
The guarantee covers failure of product for 10 years and the installation for 5 years, and is only available through a Premier Register Installer.

NOTE: Some installers do not offer this guarantee.



- Discuss your plans with prospective installers. They will help you select the right products and advise about such things as edgings and drainage.
- Always request written quotations. We recommend more than one as service levels vary and the cheapest is not always the best. Make sure each is quoting on a like-for-like basis.
- Appoint the Premier register installer with whom you feel most comfortable.

How to spot a 'cowboy'

- If they say they can 'start tomorrow' – be wary. Reputable installers are in demand and usually need many weeks notice.
- If they cold call because they 'just happen to be in the area' – be very wary. Genuine Premier Register members never cold call. If somebody turns up on your doorstep claiming to be on the Premier Register – check it out.
- Never accept a verbal estimate. Insist on a written quotation.
- Quotations should be on headed notepaper with an address and telephone number – not just a mobile.
- When you accept a quotation, ask the contractor to confirm it in writing. A 'cowboy' will be very reluctant to do so. This written contract is essential.



PLEASE NOTE:


Premier Register

Premier Register of Approved Installers are regularly inspected to ensure they comply with strict membership standards. Premier are not a party to the contract between the Registered Installer and the customer. Premier cannot be held responsible for any installation undertaken by a Premier Register Member. Details of membership are available from Premier Register Support Team on 0800 22 22 98.



STEP 1.

Measure your area to be paved to determine quantity of pavers required. This area is simply calculated by length (m) x width (m) = area (m²) for basic square or rectangle spaces (m=meters).



STEP 2.


Select the paver size that you prefer. Your choice will depend on the look you wish to achieve. Also check out our 'GENERAL TIPS' below.

STEP 3.

Select a colour that complements your area, home and surroundings.

STEP 4.

Choose to D.I.Y (do it yourself) or hire a professional contractor. If you want assistance call us on 0800 22 22 98.




For triangular areas

$1/2 \text{ base} \times \text{height} = \text{area (m}^2\text{)}$

Example:

$1/2 \text{ of } 4\text{m} = 2\text{m} \times 3\text{m} = 6\text{m}^2$

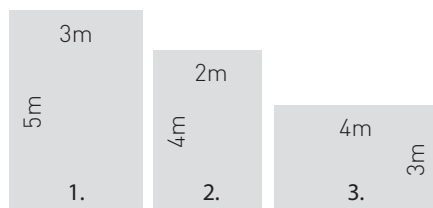

For odd shapes, break your area into sections

1. $5\text{m} \times 3\text{m} = 15\text{m}^2$
2. $4\text{m} \times 2\text{m} = 8\text{m}^2$
3. $3\text{m} \times 4\text{m} = 12\text{m}^2$
- Total = 35m^2

GENERAL TIPS

TIP 1: Select pavers that match internal floor coverings to ensure the transition from indoor-out is subtle and blends with your decoration style.

TIP 2: If paving around pools or building steps, choose from our bullnose range to create a smooth finish.

TIP 3: Combining large and small format pavers can add textural qualities for a more distinctive space.

TIP 4: When paving a small space, keep the design simple and use a neutral coloured, large format paver to create a sense of space.


TIP 5: Large format pavers, such as 600 x 600mm speed up the laying process.

TIP 6: Lighter coloured pavers make a shady area seem much brighter and warmer.


TIP 7: Darker colours add contrast and interest to your outdoor areas.




FOR SQUARE PAVERS ONLY

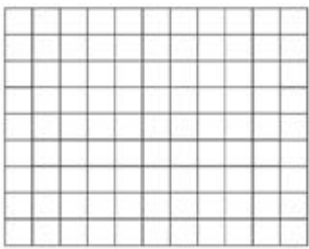


STACK BOND

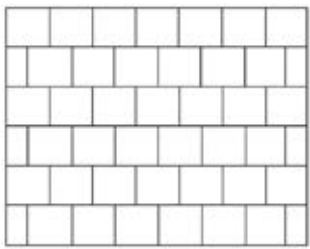

STRETCHER BOND

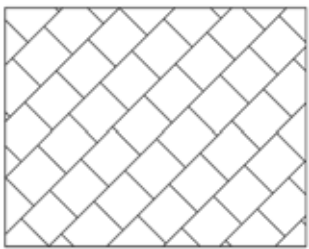


45° STRETCHER BOND




TUDOR DESIGN


600x600, 600x300,
300x300

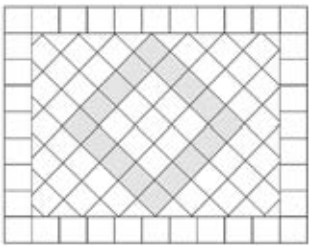


DIAMOND



STACK BOND WITH
CONTRASTING BORDER

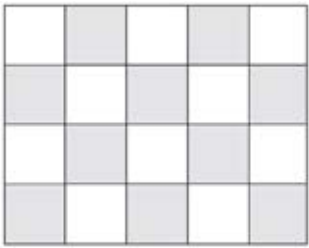


CHEQUER BOARD




DUTCH DESIGN

600x600, 300x300


FOR RECTANGULAR PAVERS ONLY

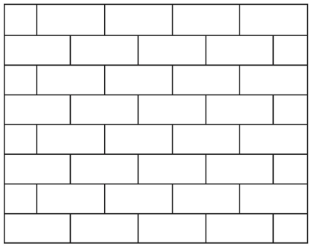


STRETCHER BOND




45° STRETCHER BOND WITH
FLAT HEADER COURSE

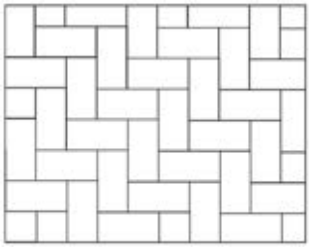


90° HERRINGBONE

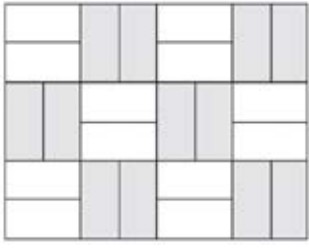

BASKET WEAVE

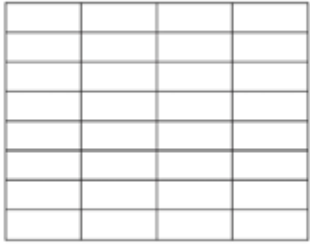

STACK BOND




HALF BASKET WEAVE

SPECIAL DESIGNS
FOR ROMANI AND
MILANO PAVERS
ONLY



Milano | 600 x 600 | Sandstone #7

Bullnose | 600 x 300 | Sandstone #7

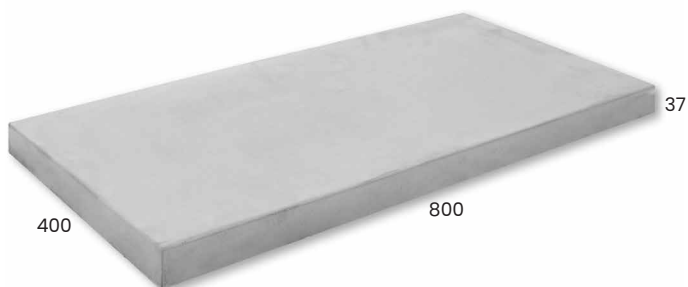

Milano 800 x 400 x 37 MM

Paver Specs

Units per m ²	3.13
m ² per pallet	12.46
units per pallet	44

Designer Colours




GREY RIVER

NATURAL STONE

Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.



SUNSET HAZE

DESERT DUSK

CREAM SANDS

SANDSTONE #7



Milano 600 x 600 x 37 MM

Paver Specs

Units per m ²	2.77
m ² per pallet	15.88
units per pallet	44

Designer Colours




GREY RIVER

NATURAL STONE

Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.



SUNSET HAZE

DESERT DUSK

SANDSTONE #7

CREAM SANDS



Beautify your world...



Milano | 600 x 600 | Sandstone #7

Bullnose | 600 x 300 | Sandstone #7



Milano 450 x 450 x 37 MM

Paver Specs

Units per m ²	4.93
m ² per pallet	12.98
units per pallet	64

Designer Colours




GREY RIVER

NATURAL STONE

Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.




SUNSET HAZE

DESERT DUSK

SANDSTONE #7

CREAM SANDS

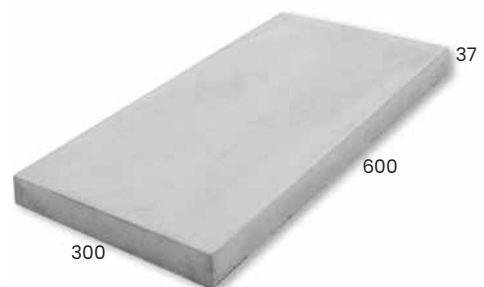


Milano 600 x 300 x 37 MM

Paver Specs

Units per m ²	5.55
m ² per pallet	15.85
units per pallet	88

Designer Colours




GREY RIVER

NATURAL STONE

Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.



SUNSET HAZE

DESERT DUSK

SANDSTONE #7

CREAM SANDS

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Milano | 450 x 450 | Natural Stone



Milano 300 x 300 x 37 MM

Paver Specs

Units per m ²	11.11
m ² per pallet	15.84
units per pallet	176


Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.



Milano 600 x 150 x 37 MM

Paver Specs

Units per m ²	1.66
Lm per pallet	106
units per pallet	176
(m ² per pallet)	15.84

Designer Colours



Beautify your world...



Bullnose | 450 x 450 | Natural Stone

Milano | 450 x 450 | Natural Stone



Milano | 450 x 450 | Cream Sands



Milano | 600 x 600 | Sandstone #7



Milano | 600 x 600 | Sandstone #7




Milano | 600 x 600 | Natural Stone (Sealed)

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Romani | 600 x 600 | Cream Sands (Sealed)

Romani | 300 x 300 | Cream Sands (Sealed)

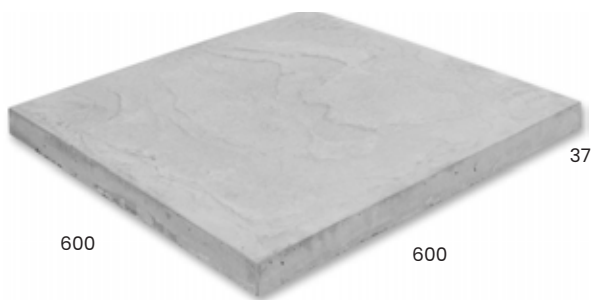

Romani 600 x 600 x 37 MM

Paver Specs

Units per m ²	2.77
m ² per pallet	15.88
units per pallet	44

Designer Colours




GREY RIVER

NATURAL STONE

Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.



SUNSET HAZE

DESERT DUSK

SANDSTONE #7

CREAM SANDS

Romani 450 x 450 x 37 MM

Paver Specs

Units per m ²	4.93
m ² per pallet	12.98
units per pallet	64

Designer Colours



GREY RIVER

NATURAL STONE

Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.

50% deposit required at time of order for non stocked items.



SUNSET HAZE

DESERT DUSK

SANDSTONE #7

CREAM SANDS



Beautify your world...



Romani | 600 x 600 | Cream Sands (Sealed)

Romani | 300 x 300 | Cream Sands (Sealed)



Romani 600 x 300 x 37 MM

Paver Specs


Units per m ²	5.55
m ² per pallet	15.85
units per pallet	88

Designer Colours



Designer Colours Made To Order

Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



Romani 300 x 300 x 37 MM

Paver Specs


Units per m ²	11.11
m ² per pallet	15.84
units per pallet	176

Designer Colours



Designer Colours Made To Order


Allow 4 weeks lead time, MOQ is 4 full pallets.
50% deposit required at time of order for non stocked items.



NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Palazzo | 450 x 450 | Grey River

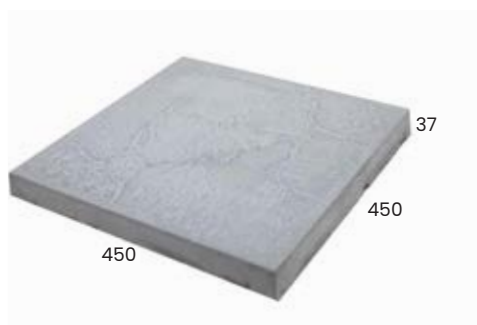


Palazzo 450 x 450 x 37 MM

Paver Specs

Units per m ²	4.93
m ² per pallet	12.98
units per pallet	64

Designer Colours

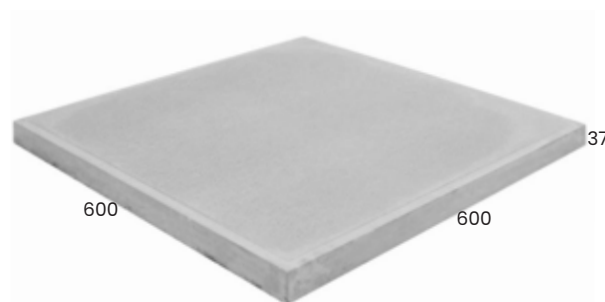

Viltorio 600 x 600 x 37 MM

Paver Specs

Units per m ²	2.77
m ² per pallet	15.88
units per pallet	44

Designer Colours



Beautify your world...



AREZZO PAVER

500 x 500 x 37 MM

Paver Specs

Units per m ²	4.73
m ² per pallet	13.53
units per pallet	64

Designer Colours




GREY RIVER



NATURAL STONE

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.

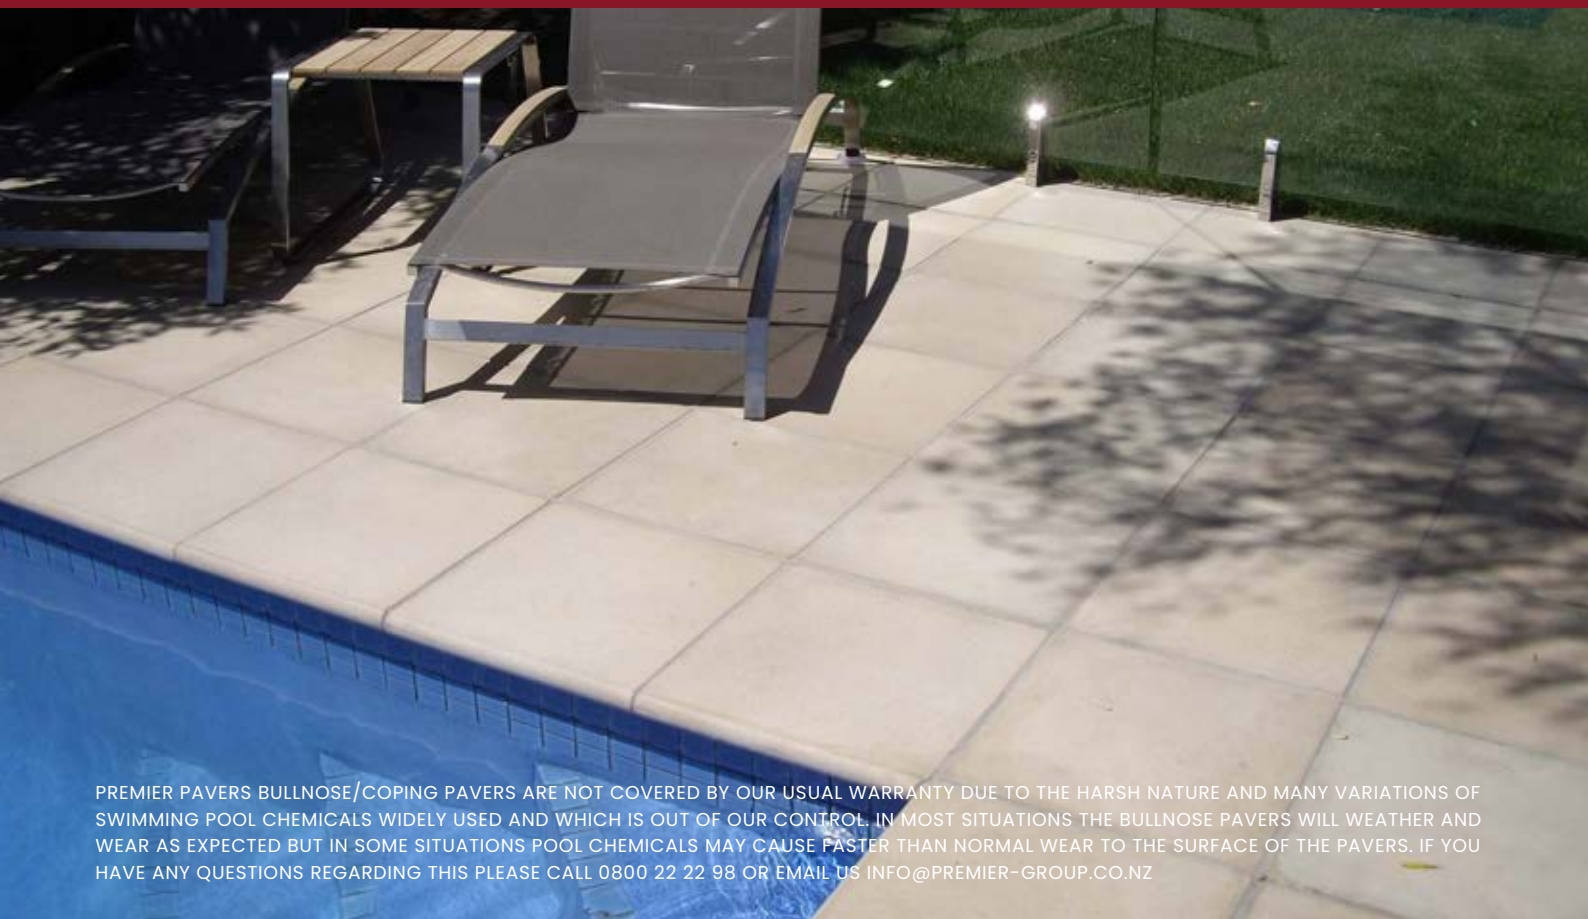

PREMIER PAVERS BULLNOSE/COPING PAVERS ARE NOT COVERED BY OUR USUAL WARRANTY DUE TO THE HARSH NATURE AND MANY VARIATIONS OF SWIMMING POOL CHEMICALS WIDELY USED AND WHICH IS OUT OF OUR CONTROL. IN MOST SITUATIONS THE BULLNOSE PAVERS WILL WEATHER AND WEAR AS EXPECTED BUT IN SOME SITUATIONS POOL CHEMICALS MAY CAUSE FASTER THAN NORMAL WEAR TO THE SURFACE OF THE PAVERS. IF YOU HAVE ANY QUESTIONS REGARDING THIS PLEASE CALL 0800 22 22 98 OR EMAIL US INFO@PREMIER-GROUP.CO.NZ

Milano | 450 x 450 | Sandstone #7

Bullnose | 450 x 450 | Sandstone #7



Bullnose 600 x 600 x 37 MM

Paver Specs

1.66 units per lineal mtr


16.8 lm per pallet

No MOQ required but a freight charge will apply

Designer Colours Made To Order

Allow 4 weeks lead time depending on season.

50% deposit required at time of order for non stocked items.



Ideal for large pools with straight edges and to create grand entrance ways and steps.

DESIGN TIP:

Looks great with all other 600 x 600 pavers in our range.



Bullnose 450 x 450 x 37 MM

Paver Specs

2.22 units per lineal mtr


19.8 lm per pallet

No MOQ required but a freight charge will apply

Designer Colours Made To Order

Allow 4 weeks lead time depending on season.

50% deposit required at time of order for non stocked items.



Ideal size for steps and stairs.

DESIGN TIP:

Looks great around medium to large size pools along with any 450 x 450 pavers from our range.

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Bullnose 600 x 300 x 37 MM

Paver Specs

1.66 units per lineal mtr

33.7 lm per pallet

No MOQ required but a freight charge will apply

Designer Colours Made To Order

Allow 4 weeks lead time depending on season.


50% deposit required at time of order for non stocked items.



Ideal for medium to large size pools with straight edges.

DESIGN TIP:

Looks great with 600 x 600 pavers from our range.



Bullnose 300 x 300 x 37 MM

Paver Specs

3.33 units per lineal mtr

29.7 lm per pallet

No MOQ required but a freight charge will apply

Designer Colours Made To Order

Allow 4 weeks lead time depending on season.

50% deposit required at time of order for non stocked items.



Ideal for curving pools edges and steps.

DESIGN TIP:

Looks great with 600 x 600 pavers from our range.

NOTE: ALL BULLNOSE PAVERS HAVE 4 WEEK LEAD TIME!


This is the 'bullnose' edge of the paver. There will be some 'pin hole' / 'air holes' which are visible up close.

This is the top edge of the paver.


Some bullnose pavers may have this lip along the bottom edge. You may grind this off after installation if you choose. Please contact us for instructions first.

This is the bottom of the paver.

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.

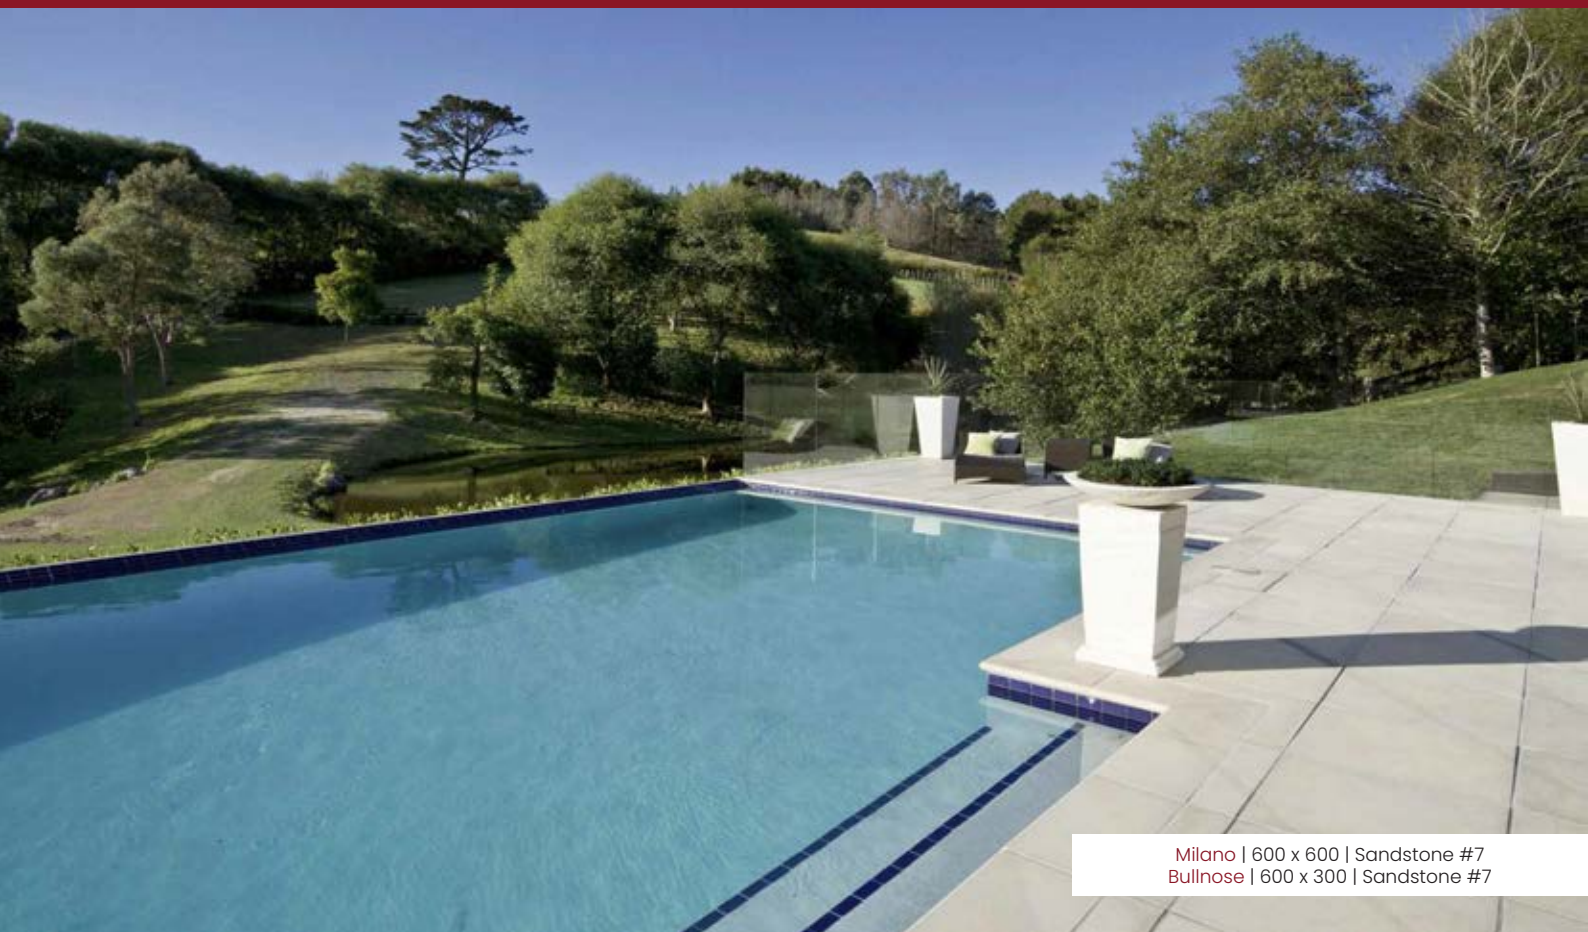

Milano | 600 x 600 | Sandstone #7
Bullnose | 600 x 300 | Sandstone #7

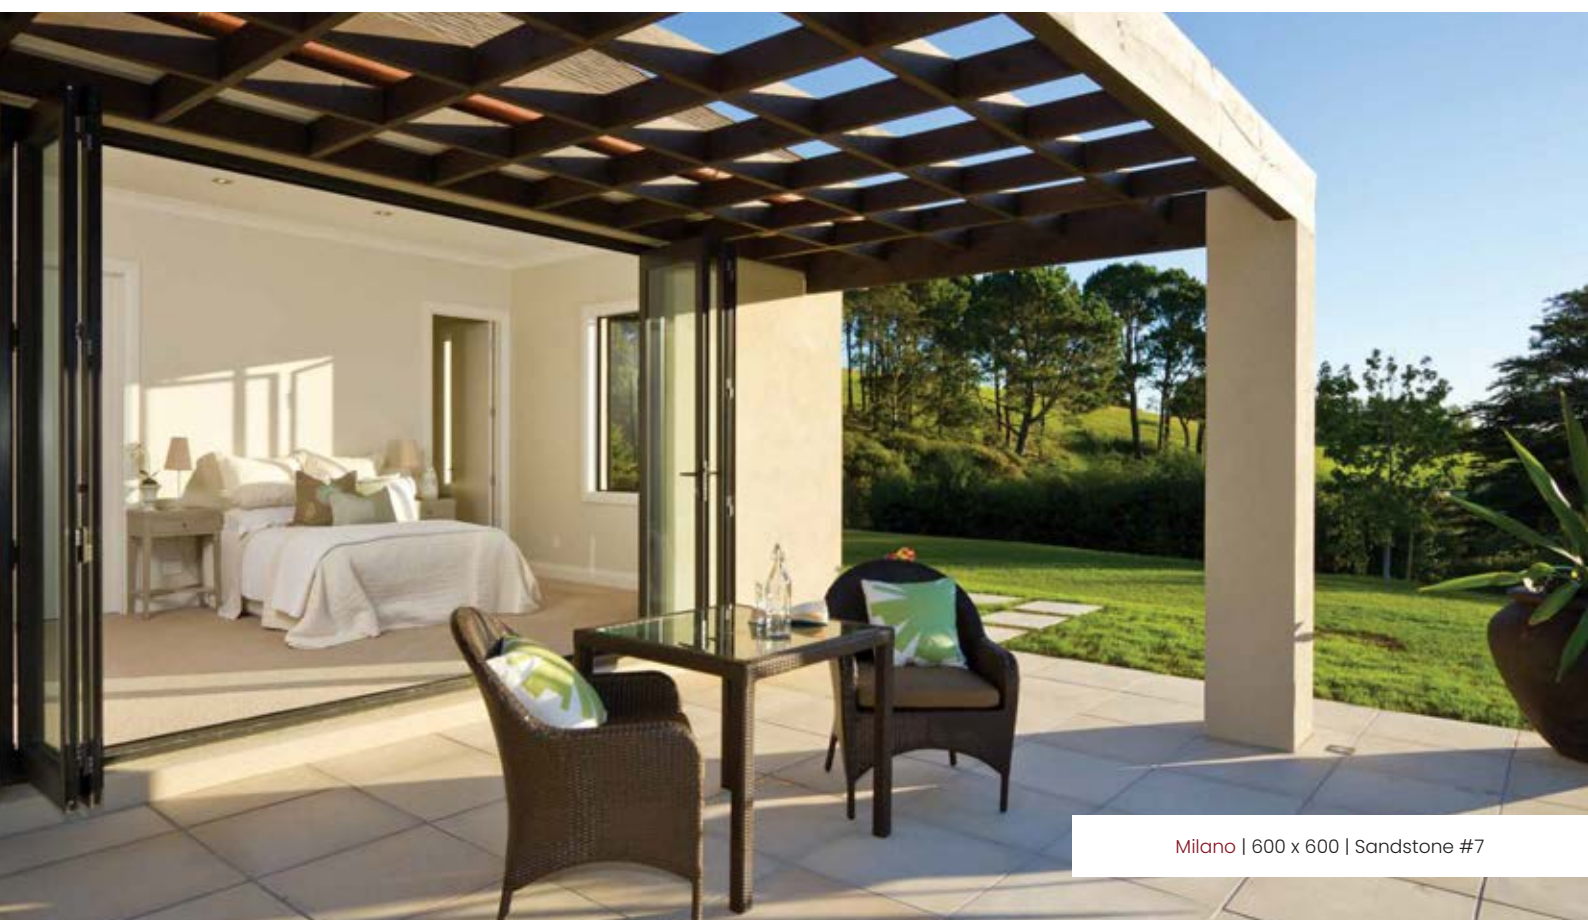

Milano | 600 x 600 | Sandstone #7



Beautify your world...



Milano | 600 x 600 | Natural Stone (Sealed)



Milano | 600 x 600 | Sandstone #7
Bullnose | 600 x 300 | Sandstone #7

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Milano | 600 x 600 | Sandstone #7
Bullnose | 600 x 300 | Sandstone #7



Milano | 600 x 600 | Sandstone #7





Milano | 600 x 600 | Sandstone #7
Bullnose | 600 x 300 | Sandstone #7




Milano | 450 x 450 | Grey River (Sealed)

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Milano | 450 x 450 | Grey River (Sealed)

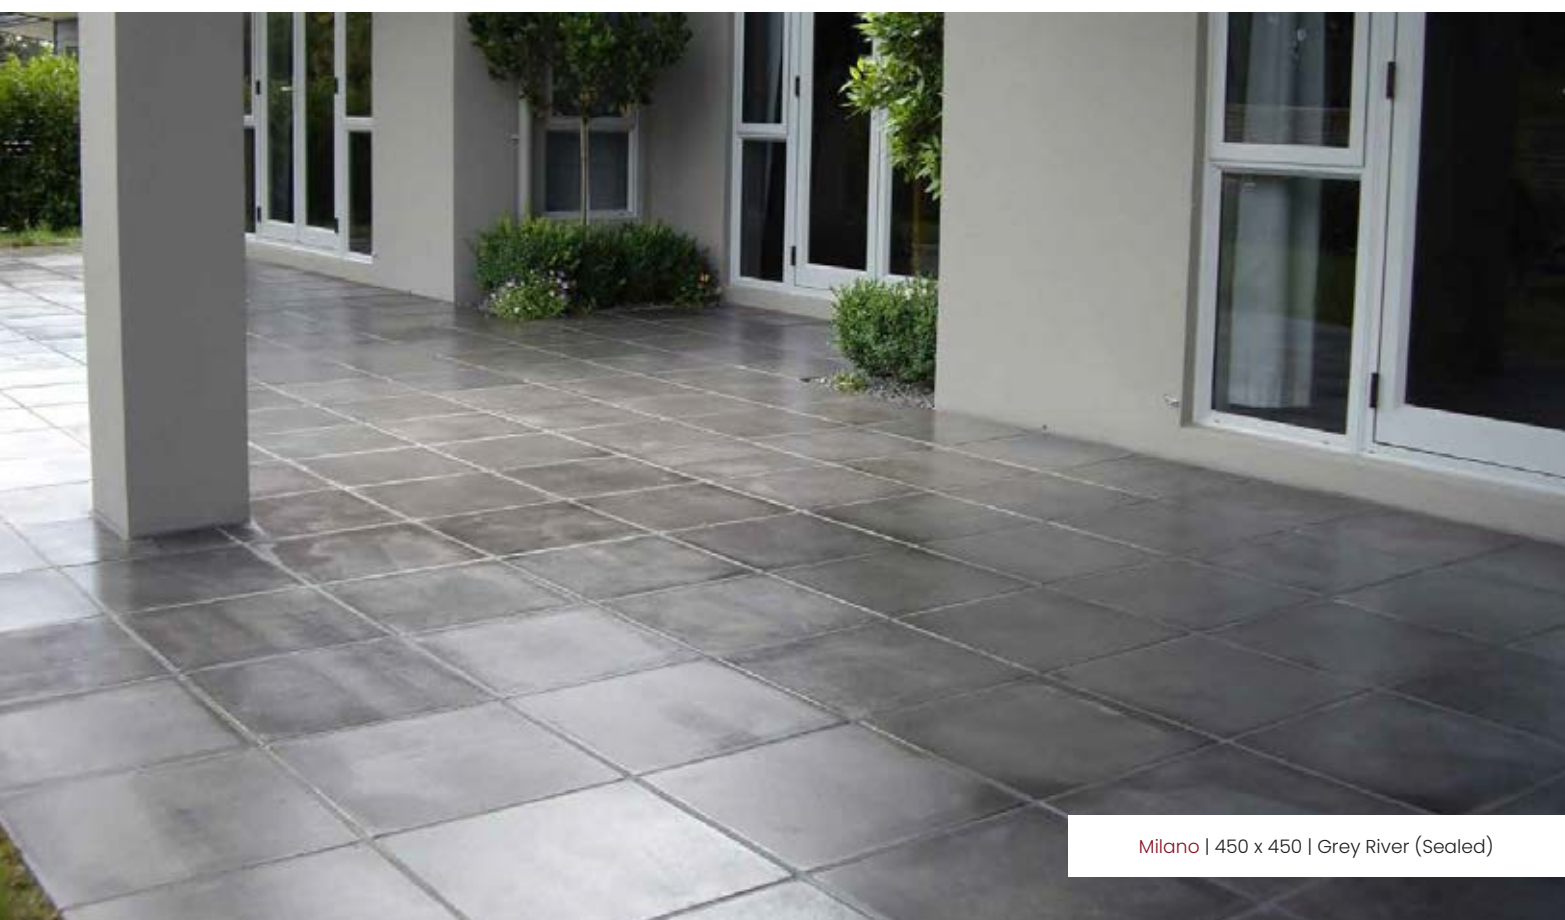


Milano | 450 x 450 | Grey River (Sealed)






Milano | 600 x 600 | Sandstone #7

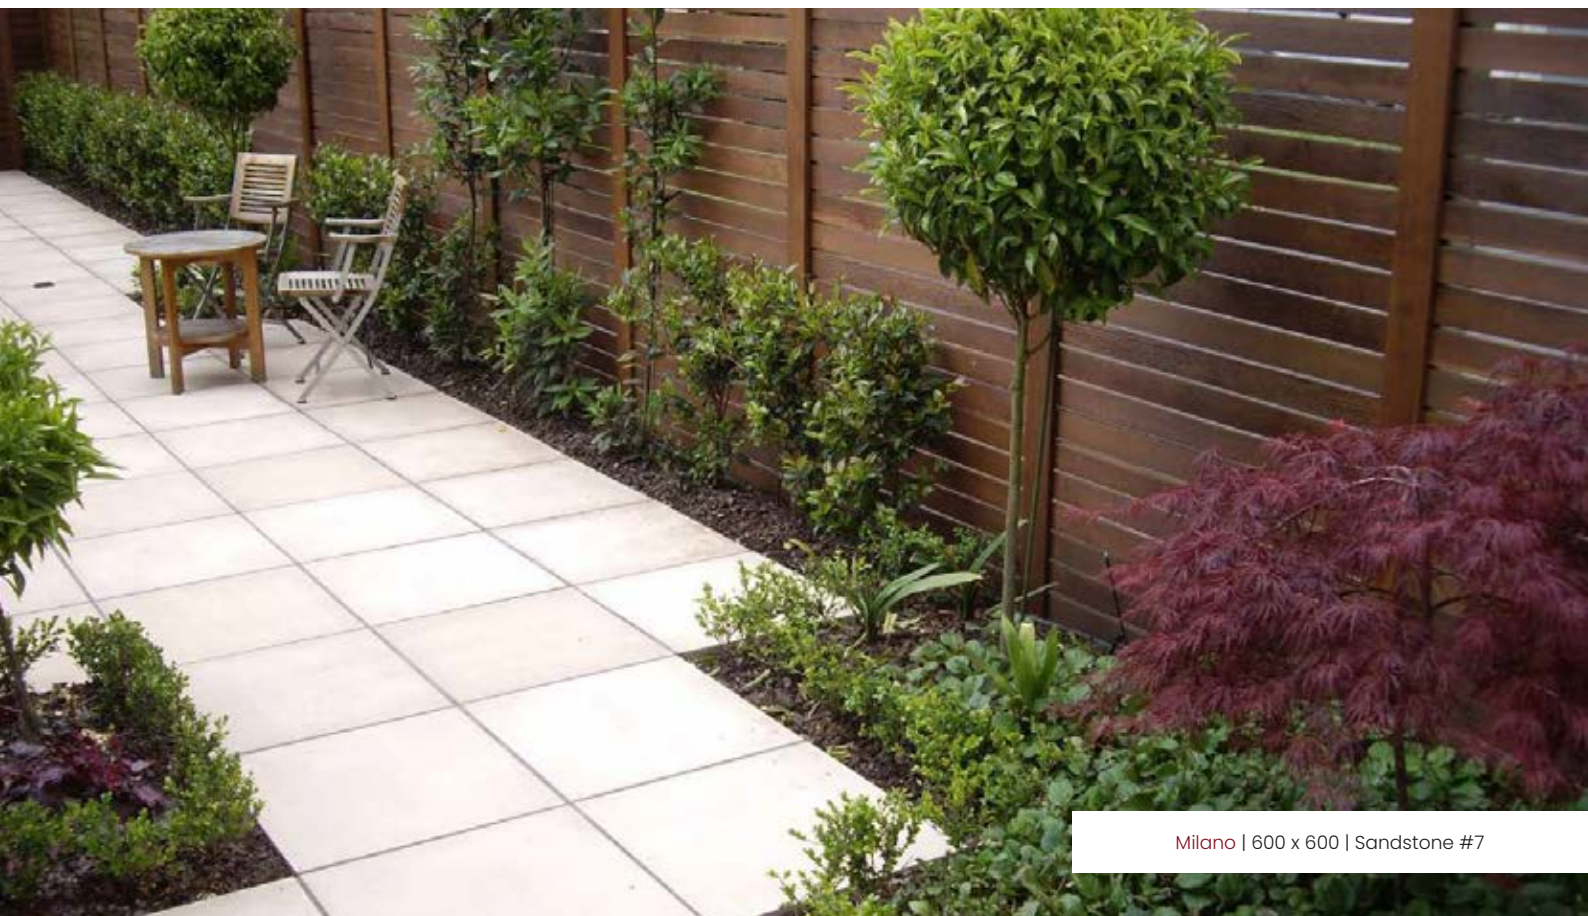

Milano | 600 x 600 | Sandstone #7

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.

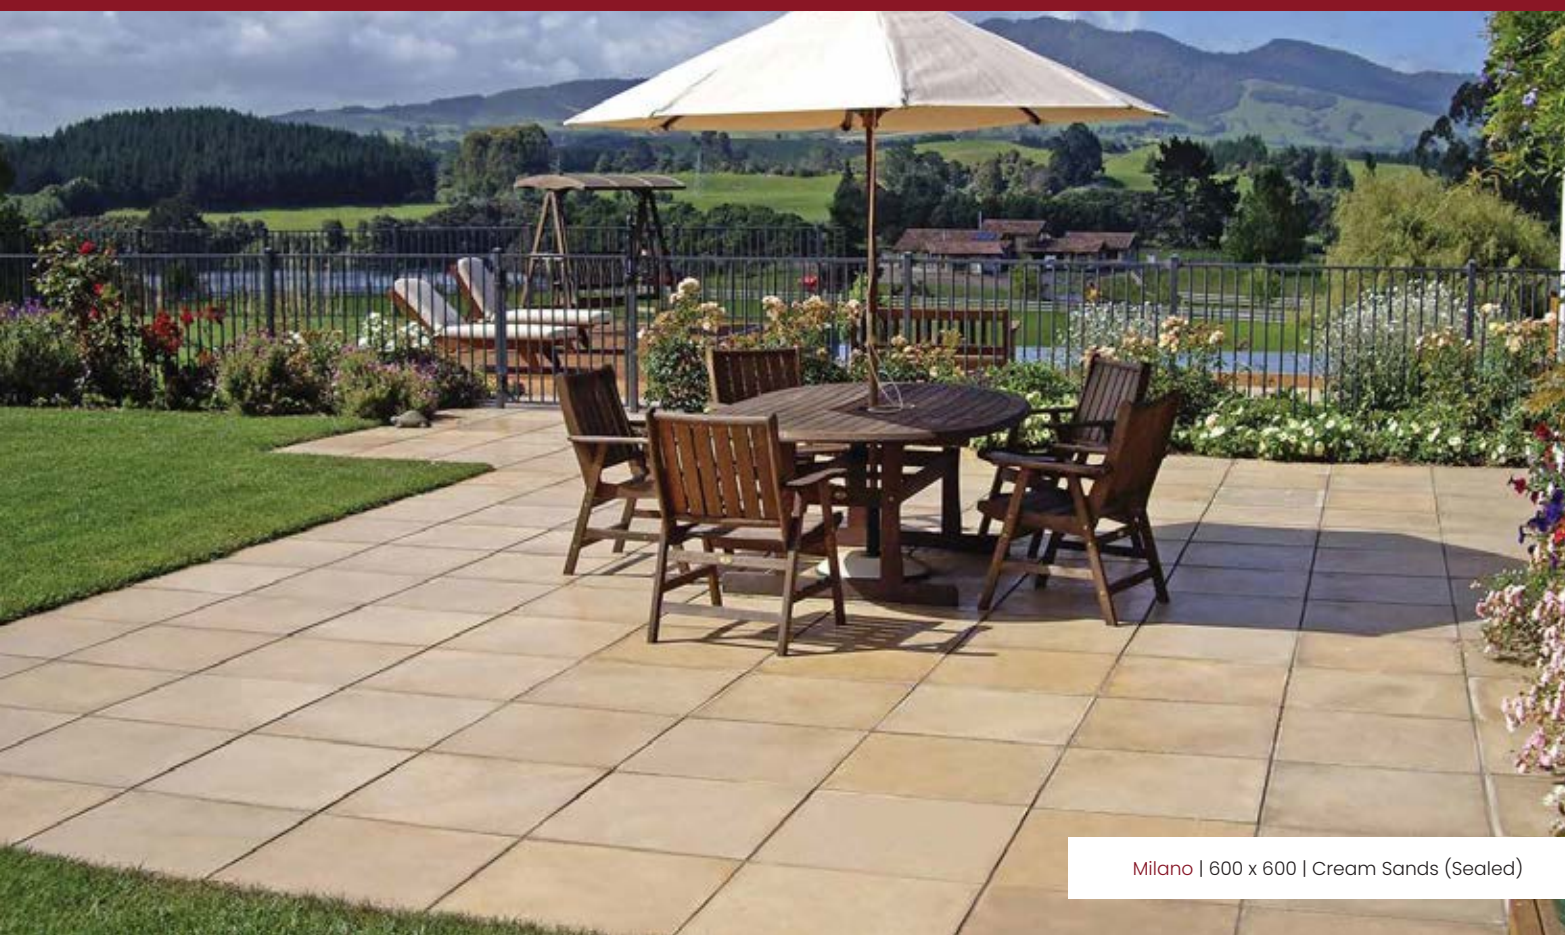


Milano | 600 x 600 | Cream Sands (Sealed)



Milano | 450 x 450, 600 x 150 | Desert Dusk



Beautify your world...

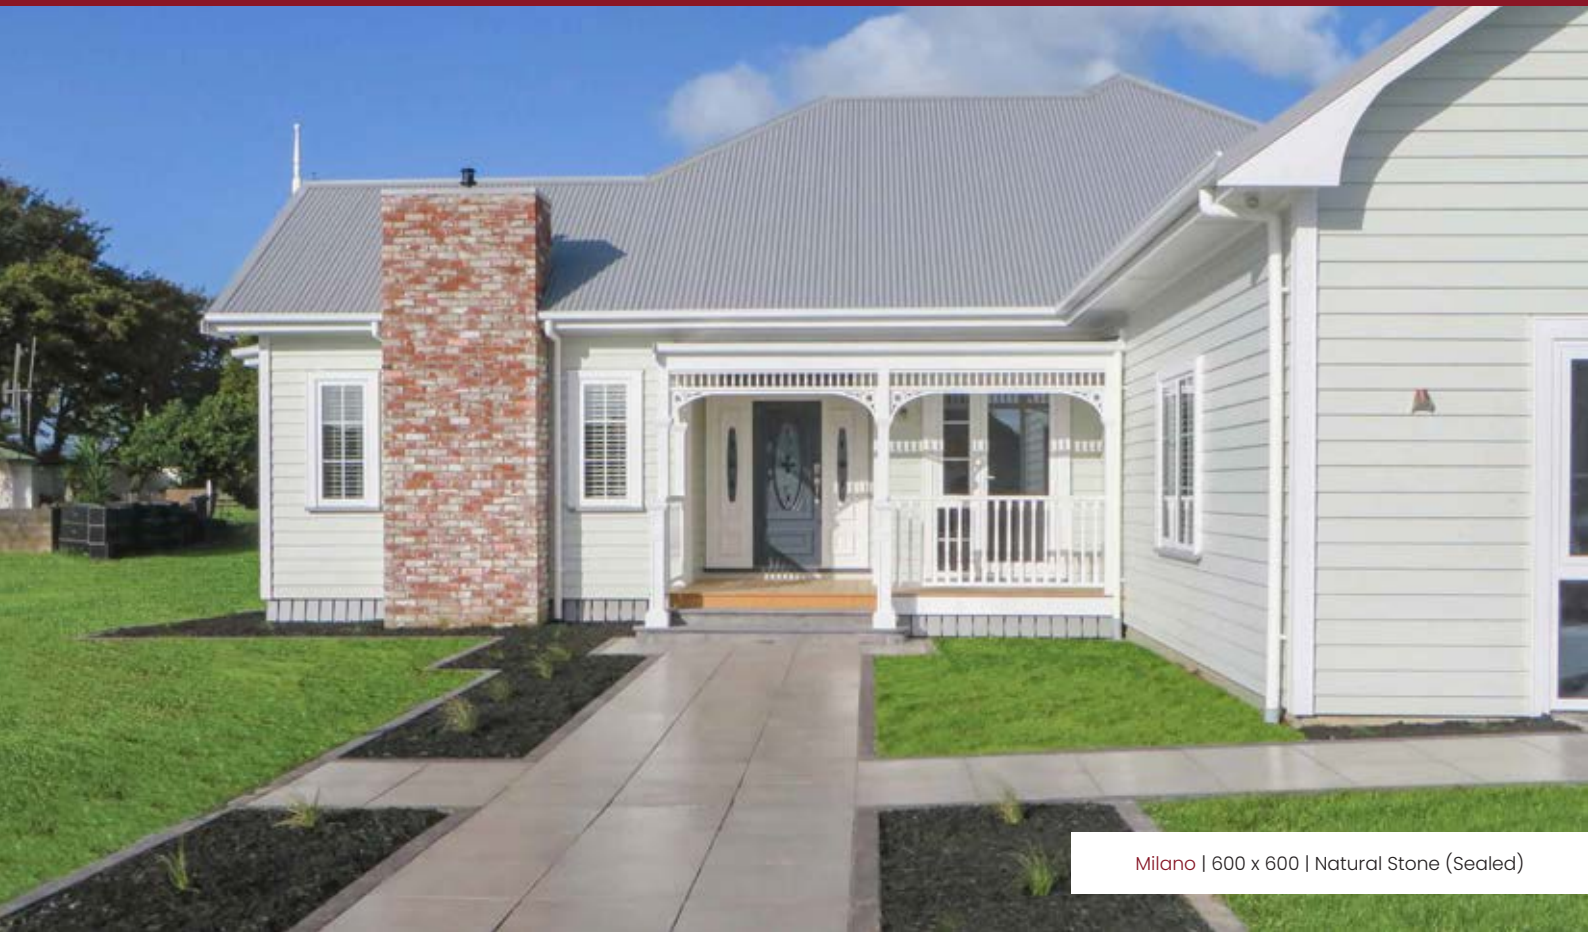

Milano | 600 x 600 | Natural Stone (Sealed)



Milano | 600 x 600 | Sandstone #7
Bullnose | 600 x 300 | Cream Sands

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



Milano | 600 x 600 | Desert Dusk



Milano | 600 x 600 | Natural Stone
Milano | 600 x 150 | Grey River



Beautify your world...



Milano | 800 x 400 | Natural Stone


Milano | 450 x 450 | Natural Stone
Bullnose | 600 x 300 | Natural Stone

NOMINAL THICKNESS MAY VARY FROM 35-40MM. ALL ITALIA RANGE PAVERS ARE RECOMMENDED TO BE LAID ON MORTAR DUE TO POTENTIAL THICKNESS VARIATION AND TO ACHIEVE A LEVEL SURFACE. DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY OCCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION. FOR EVEN MORE SLIP RESISTANCE YOU COULD ALSO USE PREMIER ANTI-SLIP SEALER.



PREMIER-ACID-WASH

When pavers, concrete or bricks lose their original beauty and dirt becomes embedded in the surface and before you seal your patio or driveway for the first time, it is necessary to acid wash your product. PREMIER-ACID-WASH makes this process simple and easy with clear instructions to follow. Acid wash will restore your pavers, concrete or bricks to their former glory.

Available in 5 litre container.



PREMIER-WHITE-CEMENT

Premier White Cement is a high quality, high strength multi-purpose white cement. This cement is best used for mortar matching lighter colour products such as Premier Bricks or Premier Pavers. For optimum colour consistency use in conjunction with the Premier Washed Sand. AVAILABLE IN 20KG BAGS.



PREMIER GROUT-JOINT P75

Hardens with moisture (WETCAST PAVERS ONLY)

The quick and easy solution to filling joints between paving slabs and setts, suitable for natural stone and concrete paving. So simple to use, P75 allows an untrained hand to consistently deliver perfect joints every time with a minimum joint width of 5mm. Available in two colours - Neutral (Buff) and Mid Grey. It delivers a weed-free, frost-resistant joint, without staining the paving - saving you time and money.



P75 & PAVERBOND GROUT MATRIX

	8-15 MM GROUT LINES (FLAG- STONES)	1-5mm GROUT LINES (BLOCK PAVING, COBBLES)	LIGHT TO MEDIUM TRAFFIC RATING	1-5mm GROUT LINES (BLOCK PAVING, COBBLES)	CAN BE APPLIED IN THE RAIN	NEEDS COVERING AFTER AP- PLICATION	WILL LEAVE BINDER FILM AFTER APPLICA- TION	12.5 KG PAILS	25 KG PAILS
P75	✓		✓			✓	✓		✓
Pavebond		✓	✓	✓		✓		✓	

Base Course Calculator

1 m³= 1.6 Tonne

Example:

Area (m²)	40.0
Thickness (m)	0.100
Volume (m³)	4.0
Plus Compaction %	1.30
Total Volume (m³)	5.2
Base Course Required (Tonne)	8.3

GAP20 Calculator

1 m³= 1.48 Tonne

Example:

Area (m²)	40.0
Thickness (m)	0.100
Volume (m³)	4.0
Plus Compaction %	1.00
Total Volume (m³)	4.0
Base Course Required (Tonne)	5.9

Mortar Mix Calculator

1 m²= 25kg

Example:

Area (m²)	1.20
Mortar Mix Required (kg)	30.00
Bag Size (kg)	30
Total Number of Bags	1.0

Eco Acid Wash Calculator

1 m²= 0.2 Litres

Example:

Area (m²)	20.0
Acid Wash Required (L)	4.00
Bottle Size (L)	3.8
Total Number of Bottles	1.0

Sweep in Grout Calculator

1 m²= 3kg

Example:

Area (m²)	50.00
Sweep In Grout Required (kg)	150.00
Bag Size (kg)	30
Total Number of Bags	5.0

Wetlook Sealer Calculator

1 m²= 0.1 Litres one coat

Example:

Area (m²)	40.0
Wetlook Sealer Required (L)	4
Bottle Size (L)	3.8
Total Number of Bottles	1.0

P75 Calculator

Approx coverage per 25kg tub

Joint Size:	600x600mm Pavers	450x450mm Pavers	100x100mm Setts
5mmx30mm deep	26m²	21m²	5.42m²
10mmx30mm deep	13m²	11m²	2.87m²
15mmx30mm deep	7m²	7m²	2m²



Beautify your world...

34 HOW TO LAY YOUR ITALIA RANGE PATIO PAVERS

This method will help overcome problems such as ants, weeds, sinking and separating

* Please note. This laying method is generally accepted as best practice worldwide for cast pavers and natural stone. Laying Italia pavers directly on sand will NOT achieve a satisfactory finish due to variations in thickness. If this laying method is not followed Premier Group NZ Ltd can take no responsibility for any ensuing quality issues and the pavers will be void of warranty.



STEP 1 .
Digout topsoil to 120mm. Install PREMIER-BASE-COURSE and rake out.



STEP 2 .
Compact base course to 60mm thick using feet or preferably plate compactor.



STEP 3 .
Check levels with tape measure. Your base course should be approx 60mm below the finished level of your paving.



STEP 4 .
Check levels with spirit level.



STEP 5 .
Mix bagged MORTAR-MIX with water to toothpaste consistency (in a wheelbarrow or mixer) or mix PREMIER-WASHED-SAND with cement, water and plasticiser - sand and cement can be ordered from PREMIER.



STEP 6 .
Trowel 5 spots of mortar mix onto base course. Then lay a strip of mortar where the next joint will be.



STEP 7 .
The spots (the mortar) should squash down and spread out to 20mm thick. Use a sponge to wet the back of each paver before you lay.



STEP 8 .
Gently tap paver down to desired level with rubber mallet. Joints should be approx 10mm wide at top of paver.


DO NOT BUTT HARD TOGETHER.




STEP 9 .
Check levels across pavers continuously and tap down if needed.



STEP 10 .
You should end up with approx 40mm paver, 20mm mortar, 60mm base. When all pavers are laid - DO NOT WALK ON FOR 24 HOURS.



STEP 11 .
Wet the surface of the pavers and pour on the PREMIER P75 Grout. Wet the grout thoroughly and sweep into the joints. Only grout 4-5m2 at a time. Ensure the grout is a wet slurry!



STEP 12 .
Sweep off the remainder of the grout 45 degree to the grout lines.



STEP 13 .
Only seal if required. Hire a professional! PAVERS MUST BE 100% DRY BEFORE SEALING.



Beautify your world...

TERMS AND CONDITIONS

In the unfortunate but unlikely event of products reaching you in less than satisfactory condition, please notify the retailer immediately.

PLEASE NOTE: Whilst every effort has been made to give sound advice, Premier Group International can take no responsibility for any loss, damage or injury sustained in following it, neither can Premier Group accept any liability in respect of products being used for any purposes other than those for which they were intended by the manufacturer. Premier Group cannot accept any liability for quality of installation of pavers or interpretation of the laying guide as these procedures are beyond Premier Group control. Premier Group recommends that all products are installed by specialist approved installers.

EFFLORESCENCE

All concrete products may, in their early life, appear to lose some intensity of colour and experience a milky-white stain on the face of the product. This is efflorescence staining. It is a temporary phenomenon and is in no way detrimental to the performance of the material and responsibility cannot be accepted for its occurrence. Clay products may also suffer from a temporary white stain called efflorescence. This is quite different from efflorescence in concrete products and is caused by soluble salts within the clay being transported by water to the surface as they dry out. Responsibility cannot be accepted for its occurrence. For further information on efflorescence staining in both clay and concrete products, please call.

COLOUR VARIATION

The colours shown in this literature are as exact as photographic and printing processes will allow. We strongly recommend that colours are judged and chosen from actual materials rather than photographic representation depicted herein. Although every effort is made to ensure consistency of product colour, variations between production batches can occur. We therefore recommend that, when purchasing materials, especially in the case of larger quantities, they all come from the same batch and that products are thoroughly mixed onsite by drawing from a minimum of three packs. All natural stone Sandstone products vary with differing geological conditions. Such variations can lead to small particles of ironstone within the product creating a darkening of the surface during natural weathering.

MAINTENANCE

Paving materials require periodic cleaning to maintain their appearance. Regular sweeping to prevent the build-up of detritus is recommended. Light coloured blocks, whilst structurally sound for driveway use, are liable to emphasise tyre marks and oil spills on the driveway. It must be accepted that these products will need more maintenance if the overall appearance is to be maintained. Proprietary cleaning agents are widely available and details of these can be obtained through Premier Group, please phone 0800 22 22 98. Care should be taken when buying cleaning agents as some varieties contain a concentration of acid, which can adversely affect the appearance of concrete products, clay and natural stone. For general cleaning of

GENERAL CARE

Sweep regularly with a stiff bristled broom to keep free from debris. During construction, cover the paved areas to protect against damage.

Protect your pavers against possible staining from mortar, oxides, cement and rust. Do not use high pressure cleaning apparatus to clean pavers. In all cases, attempt to clean a stain before it hardens or dries.

If a stain occurs, follow some simple steps: assess type of stain carefully before taking action (incorrect assessment of stain can cause the stain to be more difficult to remove). If the stain cannot be accurately assessed, conduct a trial process on a small portion of stained area to determine most appropriate action.

HEALTH AND SAFETY

Mixing Mortar: Dry or damp cement and wet concrete/mortar can cause irritation and burns to eyes and skin. Suitable eye protection and PVC gloves should be worn when handling these materials. If contact with the skin does occur, wash off with plenty of water. If contact with eyes occurs, irrigate with plenty of water. If irritation/burning persists, seek immediate medical attention.

Cutting: The cutting of concrete, clay and stone products with high speed cutters produces dust. Inhalation of excessive amounts of dust over a long period of time may cause long-term health effects. Suitable eye protection (safety goggles) and respiratory protection (dust mask) should be used when cutting.

Manual Handling: Most of our products are heavy. Some are very heavy. Appropriate handling precautions include wearing protective gloves and footwear and obtaining assistance when moving items weighing over 20kg.

dirt and algae, vigorous brushing with a stiff yard broom with plenty of hot detergent solution (washing up liquid or non-bio washing powder), thoroughly rinsed with clean water should suffice. Repeated treatment maybe required for paved areas sited beneath trees or in permanent/near shade. In certain circumstances, prolonged contact with wet leaves can result in staining of the paved area. Such contact should be avoided where ever practical. Certain common garden chemicals such as Ferrous Sulphate can stain paving. Please check the information given on the container holding the chemical. If chemicals are spilt on the paving remove immediately by rinsing away with clean water.

Power-washing with high pressure equipment is not normally required. Should these methods be employed, the following precautions should be observed:

1. Paving should be thoroughly swept to remove detritus (loose debris) that could act as an abrasive agent when moved by the force of a power jet.
2. A trial area should be tested before larger scale power-washing takes place.
3. No more than a medium pressure should be applied when washing paving.
4. The power-washing lance should be held at an oblique angle to the paving and at least 200mm (8") from the surface.
5. If excess sand is washed from the joints during the washing exercise, it is important that the joints are re-sanded with similar materials upon completion.
6. If mortar joints between pavers are damaged during power washing they should be re-pointed. made good with fresh pointing as required, to maintain the integrity of the paving.

SUITABILITY / APPLICATION

The paving flags illustrated in this literature are primarily intended for domestic/landscape use only. Paving flags suitable for areas subject to intense foot traffic, ie pedestrian precincts and commercial applications, etc are detailed in separate literature. This literature is available on request by telephoning 0800 22 22 98. For areas subject to vehicular overrun (driveways, parking areas, etc), block paving products are recommended. The block paving products illustrated in this literature are intended for pedestrian and light vehicular overrun applications (driveways and similar). For pavements subject to frequent overrun of heavy vehicles, block paving from our commercial/specification range should be used. These are detailed in separate literature, copies of which are available on request by phoning 0800 22 22 98.

STAIN REMOVAL GUIDE	
PROBLEM	SUGGESTED CLEANING METHOD
Efflorescence* (white powdery deposit)	Brush first with a stiff bristled broom. Then hose with clean water. If this doesn't work - wash with PREMIER-ACID-WASH as per label instructions. Weathering will eventually stop process from occurring
Leaves, Bark, Algae, Food and Wine Stains	Use 10 part water to 1 part bleach, then wash down
Chewing Gum	Freeze with dry ice and remove with a spatula
Ivy Suckers	Apply a heat gun to the suckers until they go hard. Allow them to cool and dry, then scrub them off with a stiff bristled broom

*Efflorescence occurs naturally in cement based products.

PREMIER PAVERS DIMENSIONS POLICY

ITALIA RANGE & TRUESTONE RANGE

All dimensions given are nominal and subject to manufacturing tolerances. The quoted dimensions of our paving ranges are those normally attained when the slabs are arranged correctly spaced, i.e. sizes are given inclusive of joints, which are typically 10mm. This policy enables you to simply plan the area covered and quantities required for your project without having to calculate a separate allowance for joint widths. Avoiding the complication of joint measurements is particularly helpful when planning random layouts. If precise dimensions are crucial, confirm the actual sizes and tolerances by measuring several samples of the product at your local stockist. Our policy is continuous innovation and product improvement. We therefore reserve the right to vary designs and specifications without notice.

WEATHERING

It should be appreciated that with all products, natural curing, weathering and site conditions can cause shade variation to appear across the surface of individual paving units. This does not in any way affect the performance of the paving and any such variation will diminish over a period of time as the paving matures. Both natural stone and concrete products are affected by the action of sunlight and rainfall over time.

PREMIER PAVERS 10 YEAR WARRANTY

Premier Group warrant that Premier Pavers will not break up and that the surface will not wear away unusually fast within 10 years from date of purchase. Any liability for product failure that may arise will be limited to repair or replacement of the defective product and will only apply for the benefit of the original purchase. Premier Group will not be liable for any consequential loss or damage, or transport charges.

THE WARRANTY IS CONDITIONAL ON:

1. Construction, installation and maintenance being carried out as specified in the Premier Paver Manual/Brochure/Website. In the case of wetcast paving (Italia range) this means paving MUST be laid using the recommended 5 spot mortar method.
2. Warranty certificate being returned to the manufacturer within 21 days of purchase together with proof of purchase.

THIS WARRANTY DOES NOT COVER THE FOLLOWING:

1. Sealers, grouts or mortar. This includes any issues that may arise relating to or resulting from the application of sealers, grouts and mortars.
2. Normal wear and tear, damage by impact or acts of God.
3. Situations where the Pavers have been subject to exposure to chemicals, water blasters or other corrosion causing products (see Premier Pavers Maintenance info for guidelines).
4. Unsuitable use of the product: e.g. used as Bricks.
5. Batching and natural colour variations.
6. Efflorescence: All cement based products are subject to this natural phenomenon. It can appear to "whiten" or fade the product. It will gradually diminish over time or you can choose to acid wash and seal with Premier Products.
7. Colour: Premier products are manufactured from natural materials for natural results. Colour variation is normal and is part of the natural beauty of the product.
8. For wetcast pavers (Italia range) Thickness variations. (Thickness variation is a non-issue if laid using the recommended 5 spot mortar method).
9. All natural variations as explained in the following statements.

POINTING

We recommend that PREMIER-SWEEP-IN-GROUT (for Lifestyle Range) is used to fill pavings joints and should be completed within a few days of laying. This will provide a more permanent finish and ensure maximum surface drainage. It should be recognised that poor drainage (which includes the sub-base design) may result in water retention which can affect the weathering characteristics of a paved area.

*For wetcast pavers and Truestone use Premier's resin based grout compound P75. Application instruction and video tutorial are available.

SALES TERMS AND CONDITIONS

Your signature on the freight docket is confirmation that the stock has been received in good condition. Credits cannot be issued where freight dockets have been signed.

IMPORTANT NOTICE

PRODUCT LAID IS DEEMED TO BE ACCEPTED

It is important to understand that Premier Group Products are created from natural materials to achieve a natural look. This means that every Premier product captures nature's variety and beauty and any variations you see will not affect the performance of the product but rather will enhance a natural, weathered stone appearance. Natural variations as explained in the order confirmation and our brochure include: Colour variations, small chipping and texture variations including hairline fissures, crazing and texture variations typical of stone based materials. Any variations from the samples you have seen ensure your paving project is unique and special to your property.



CAUTION! To prevent marking - keep pavers stacked straight and dry until laid!! DO NOT use polystyrene as steppers!!

QUALITY: If for some reason, you are not completely satisfied with the quality of the product, please contact us immediately. We will not accept any claims for labour costs to remove or relay products that have been installed. Our warranty is limited to free replacement of product, deemed to be unsatisfactory by us, before installation takes place. Terms and conditions apply.



DID YOU KNOW?

WE ALSO HAVE THESE BEAUTIFUL PRODUCTS...

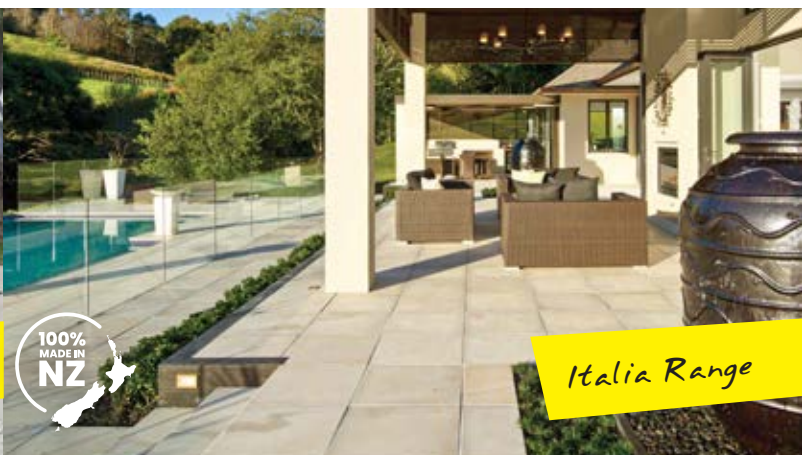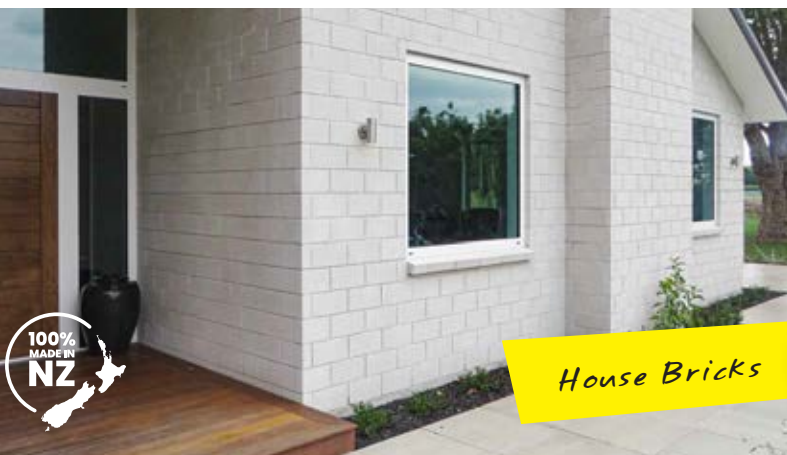

Call now for FREE quotes or advice!

0800 22 22 98

visit us at www.premier-group.nz

email us at info@premier-group.co.nz

PREMIER GROUP NEW ZEALAND

Head Office Te Rapa, Hamilton, New Zealand

Postal Address PO Box 12172, Hamilton 3248, New Zealand

IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.

© Copyright 2025 Premier Group. All rights reserved.