

**PREMIER
PAVERS**

*Distinctive Driveways
and Patios*


LIFESTYLE RANGE

Create beautiful driveways, patios and paths



COURTYARD | 60mm | IRON SAND

200525

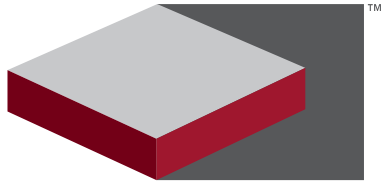

PREMIER PAVERS

*Distinctive Driveways
and Patios*




THANK YOU!
FOR CHOOSING PREMIER PAVERS!

At Premier Pavers, we are dedicated to making your paver selection process a very happy & enjoyable experience! From our top quality & timeless products, to our lovely team of people, we are sure that you will be absolutely delighted with your choice!

Thanks again!
From the team at
Premier Group New Zealand



Important note: Please visit our website for the very latest / up to date information.

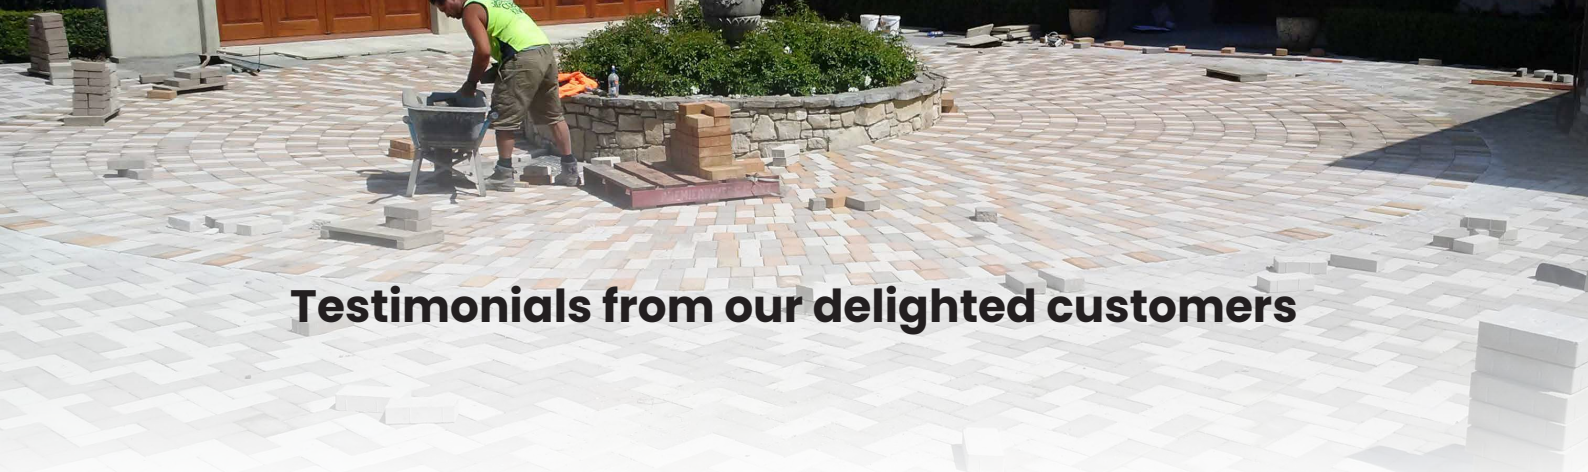

Testimonials from our delighted customers

" I was looking for Pavers. I had seen what I liked so with a bit of kiwi know how went straight to the source, Premier Pavers. There was no looking back. It was the best decision I have made. I got a great product and a great job done. I have the look I wanted thanks to Premier Pavers. I would recommend them to anyone wanting great quality and detail. I'm certainly a satisfied customer. "

Leigh / Homeowner

" After all the positive experience we have had with the Premier Pavers group, OuterLife has no issues whatsoever in highly recommending them. On top of an excellent, economical product, they also present with top notch service and go out of their way to ensure that your expectations are both met and surpassed. "

Aaron Shirriffs / Director of Outerlife Landscapes from Palmerston North

" The paving job is complete and looks fantastic. The owner agrees – the most important feedback... Your service was 10/10. Product was also great – out of the 60 pavers, 1 paver had a hairline crack through one third and another had a smaller hairline crack. I was able to use those two for the pavers I had to cut. Delivery was also 10/10... I would recommend the purchase of your pavers to others. "

Selwyn – Landscaper

" The best value for money paving in NZ- extremely durable, very safe and very low maintenance. "



Doug Walker / Pave Direct Ltd

" The quality of Premier pavers is the best that I have come across. They certainly make my job of laying pavers easier due to how well they are constructed, and the service Premier provides is outstanding! "

Chris / Landscaper

" We are delighted with our beautiful new patio at our home. Thank you for your excellent service, quality of product and installation work provided by your recommended installer, Prestige Pavers. It has been a pleasure to deal with Premier Pavers all through this small but important project. "

Colin & Sheila – Homeowners

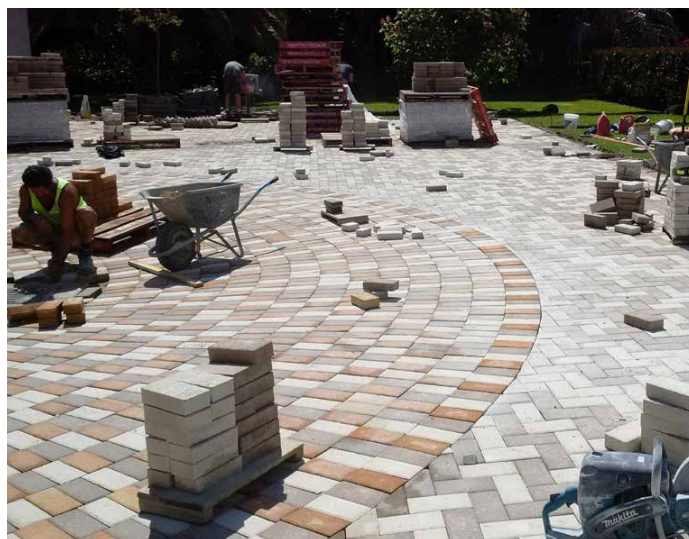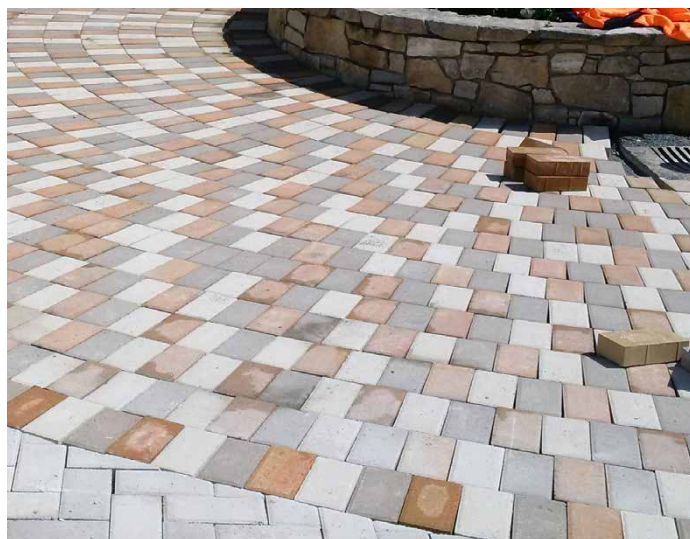


4 LIFESTYLE RANGE | DRIVEWAY PAVERS



Courtyard | 60mm | Iron Sand

Unipave | 60mm | Ash

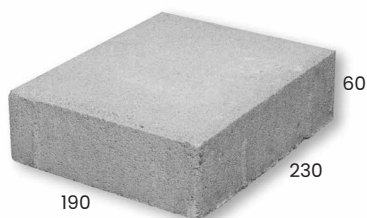

Regency 230 x 190 MM

Paver Specs

Units per m ²	23
m ² per pallet	10.4
units per pallet	240

Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.

50% deposit required at time of order for non stocked items.



Courtyard 270 x 270 MM


Paver Specs

Units per m ²	14
m ² per pallet	10.28
units per pallet	144

Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.


50% deposit required at time of order for non stocked items.

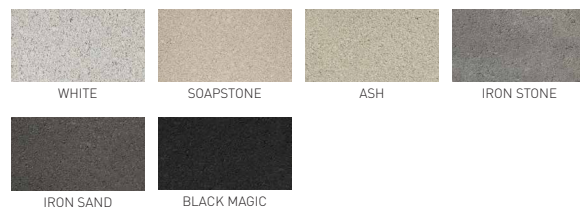

Beautify your world...



Unipave | 60mm | Iron Stone & Ash



Unipave 230 x 115 MM


Paver Specs

Units per m ²	38
m ² per pallet	10.52
units per pallet	400

Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.

50% deposit required at time of order for non stocked items.

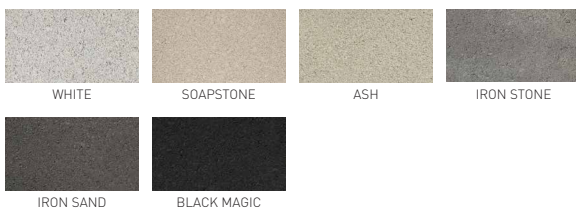

Matakana


Paver Specs

Units per m ²	19
m ² per pallet	10.1
units per pallet	192


Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.

50% deposit required at time of order for non stocked items.

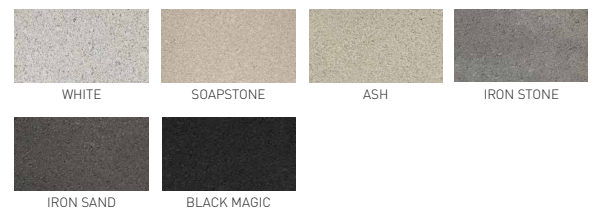


DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY ACCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION..

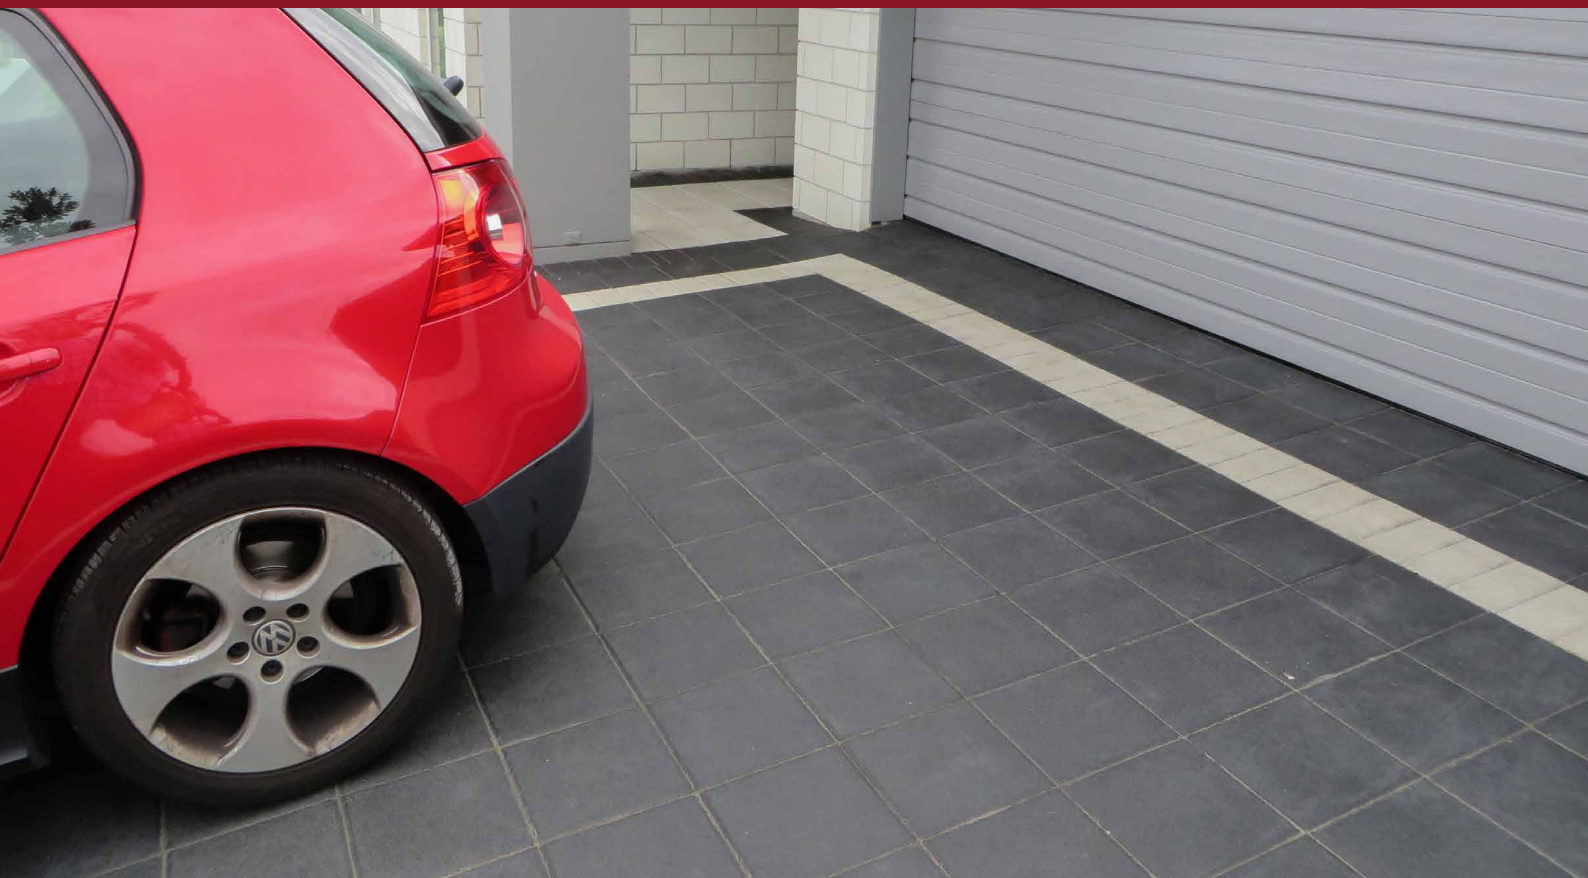

Courtyard | 60mm | Black Magic

Unipave | 60mm | White



Aquaflow Paver


Paver Specs

Units per m ²	47
m ² per pallet	10.6
units per pallet	500


Designer Colours

Allow 4-6 weeks lead time, MOQ is 5 full pallets.

50% deposit required at time of order for non stocked items.

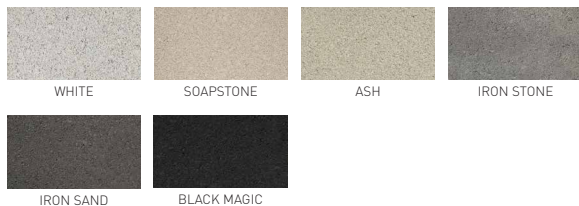

Unipave | 60mm | Iron Sand & Tuscany

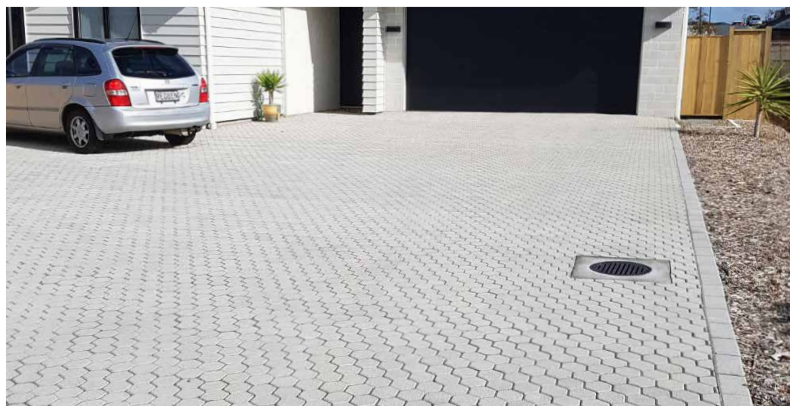

Aquaflow Paver | 60mm | Ash



Beautify your world...



Courtyard | 60mm | Iron Sand Unipave | 60mm | Ash




Regency | 60mm | Iron Sand



Courtyard | 60mm | Iron Sand Unipave | 60mm | Ash




Courtyard | 60mm | Black Magic

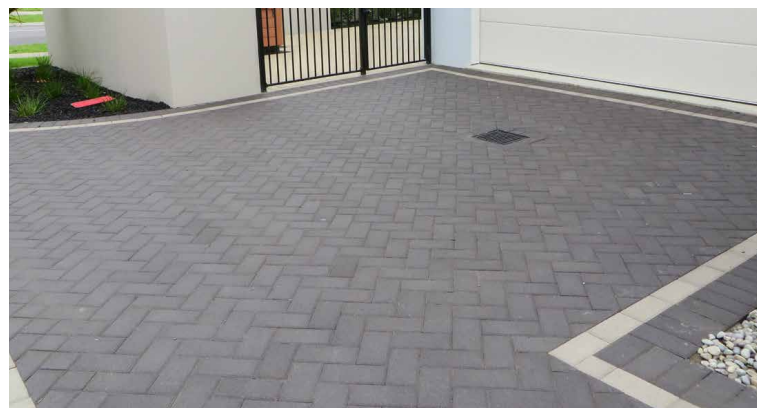

Unipave | 60mm | Iron Sand & Ash

DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY ACCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.

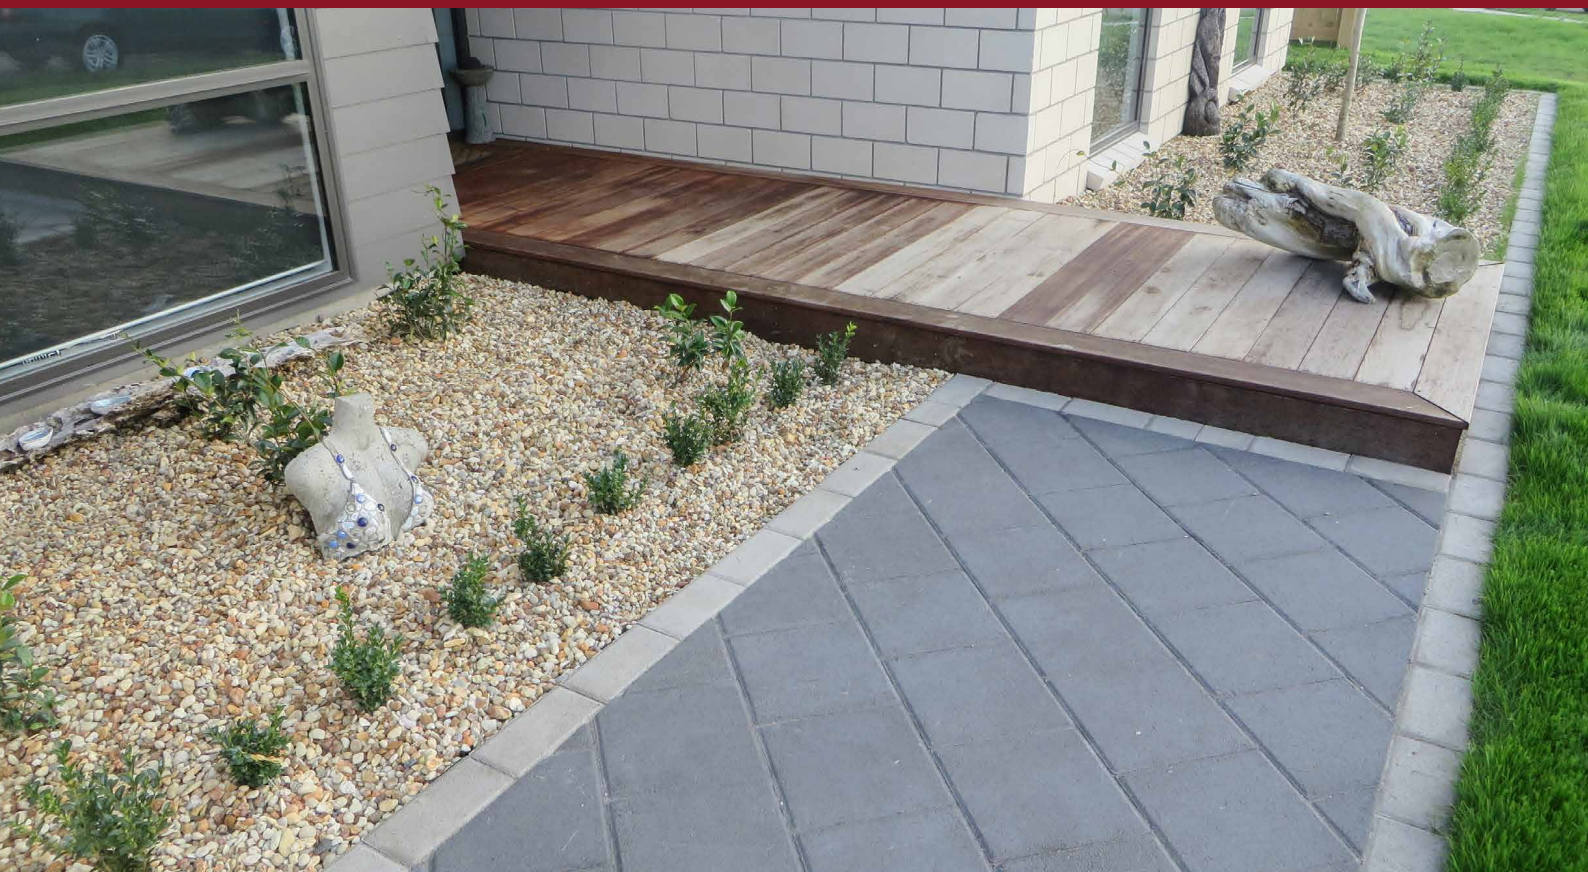

Courtyard | 40mm | Iron Sand

Unipave | 40mm | Ash



Flagstone 400 x 400 x 40 MM

Paver Specs

Units per m ²	6.25
m ² per pallet	14.4
units per pallet	90

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.

50% deposit required at time of order for non stocked items.



Unipave 230 x 115 x 40 MM


Paver Specs

Units per m ²	38
m ² per pallet	15.8
units per pallet	600

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.

50% deposit required at time of order for non stocked items.

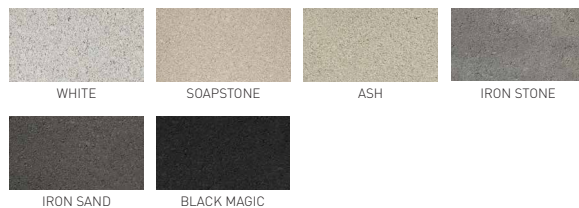

Beautify your world...



Courtyard | 60mm | Black Magic



Courtyard 270 x 270 x 40 MM

Paver Specs

Units per m ²	14
m ² per pallet	14.9
units per pallet	208

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.

50% deposit required at time of order for non stocked items.



Regency 230 x 190 x 40 MM

Paver Specs

Units per m ²	23
m ² per pallet	15.7
units per pallet	360

Designer Colours

Allow 4 weeks lead time, MOQ is 1 full pallets.


50% deposit required at time of order for non stocked items.



DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY ACCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.



Regency | 60mm | Iron Sand

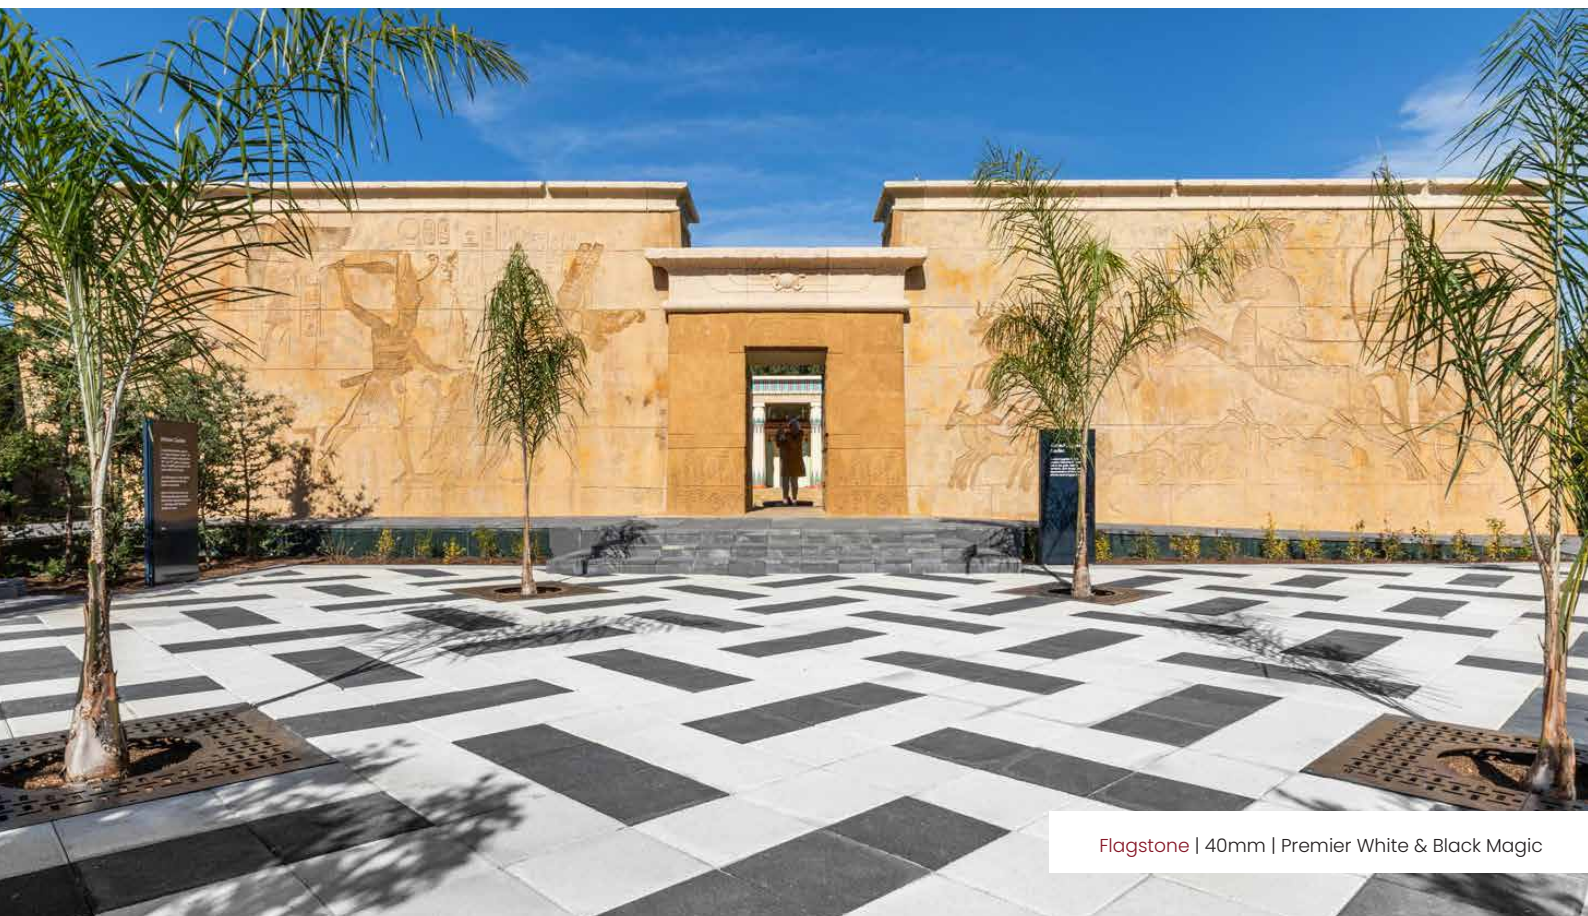

Flagstone | 40mm | Premier White & Black Magic



Beautify your world...




Flagstone | 40mm | Ash
Unipave | 40mm | Iron Sand



FlagStone | 40mm | Iron Sand &
Iron Stone & Premier White

DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY ACCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION.

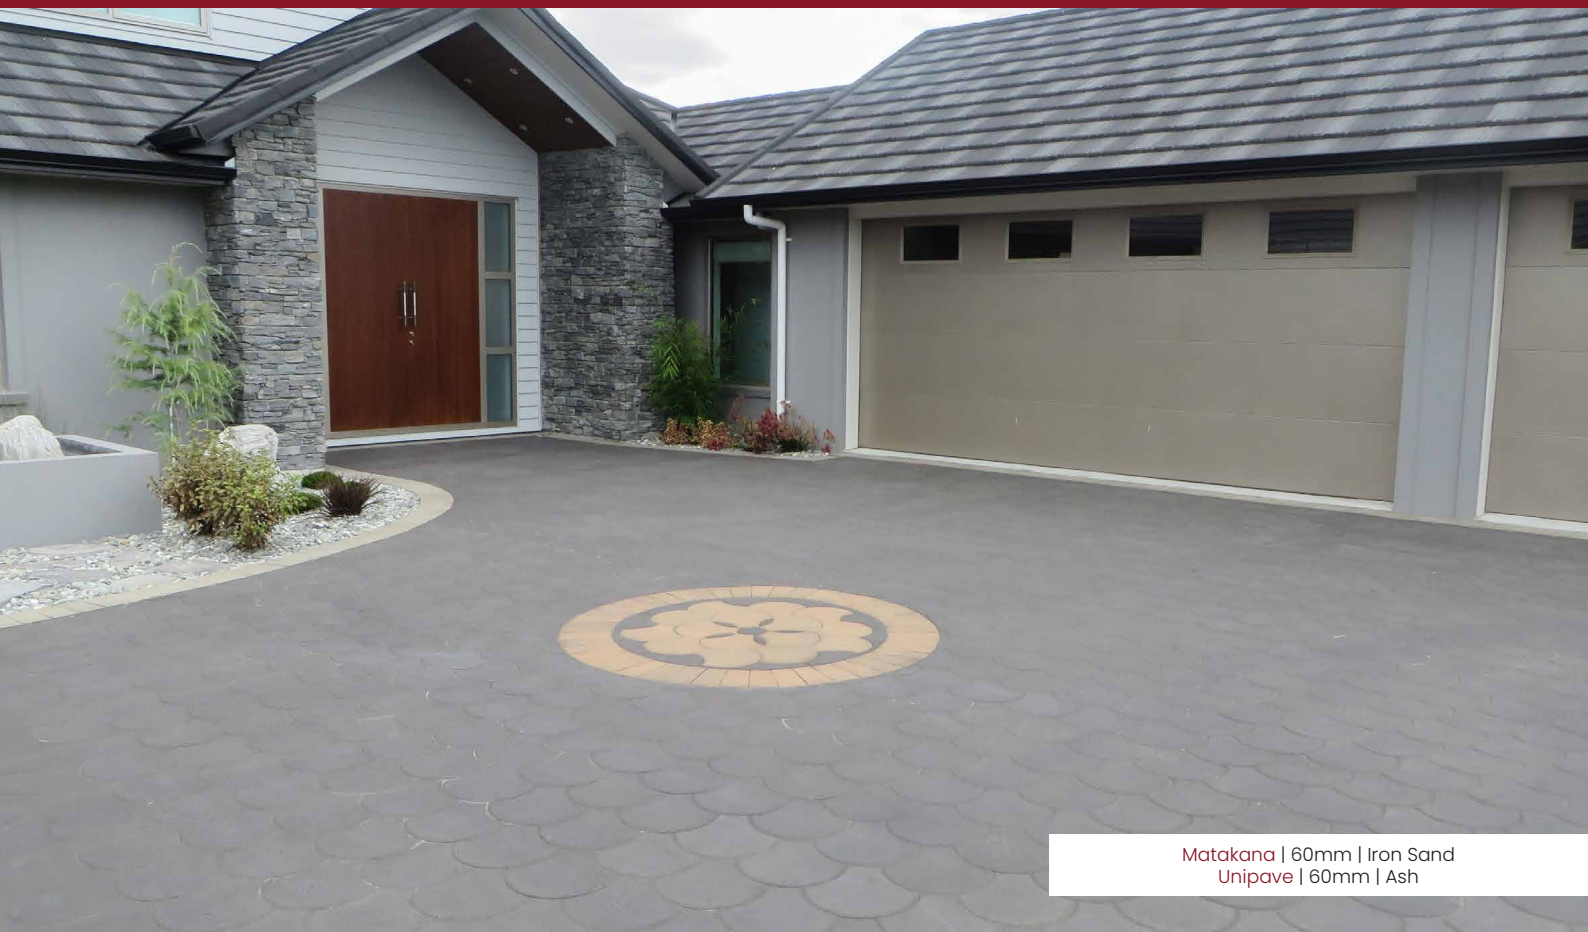


Matakana | 60mm | Iron Sand
Unipave | 60mm | Ash




Courtyard | 60mm | Iron Sand
Unipave | 60mm | Ash



Beautify your world...

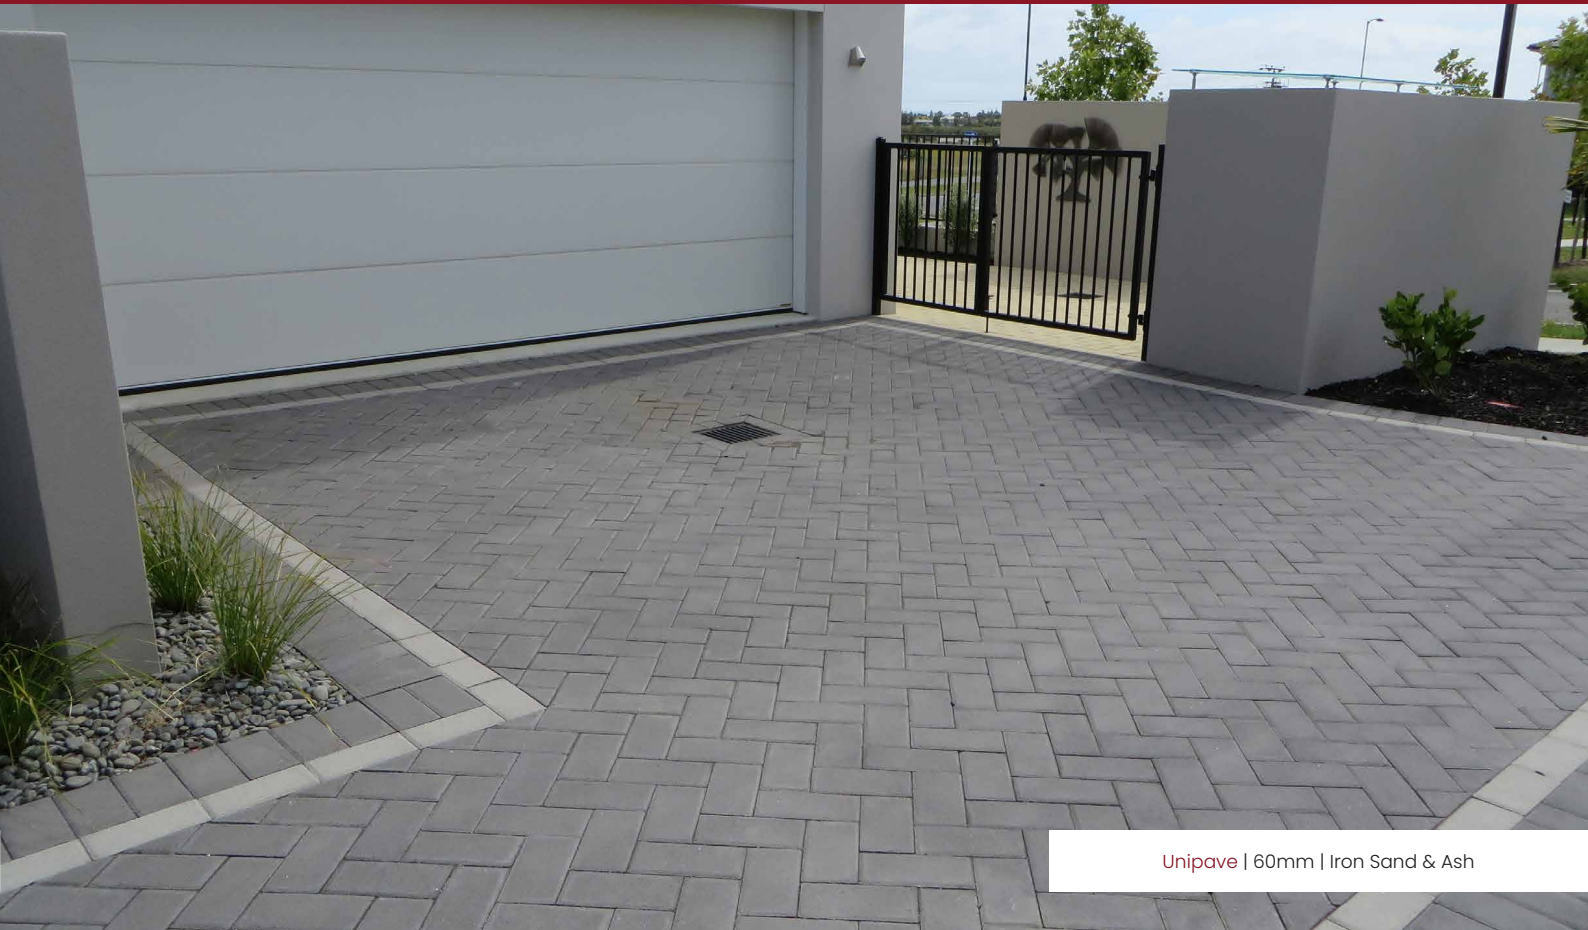

DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY ACCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION..

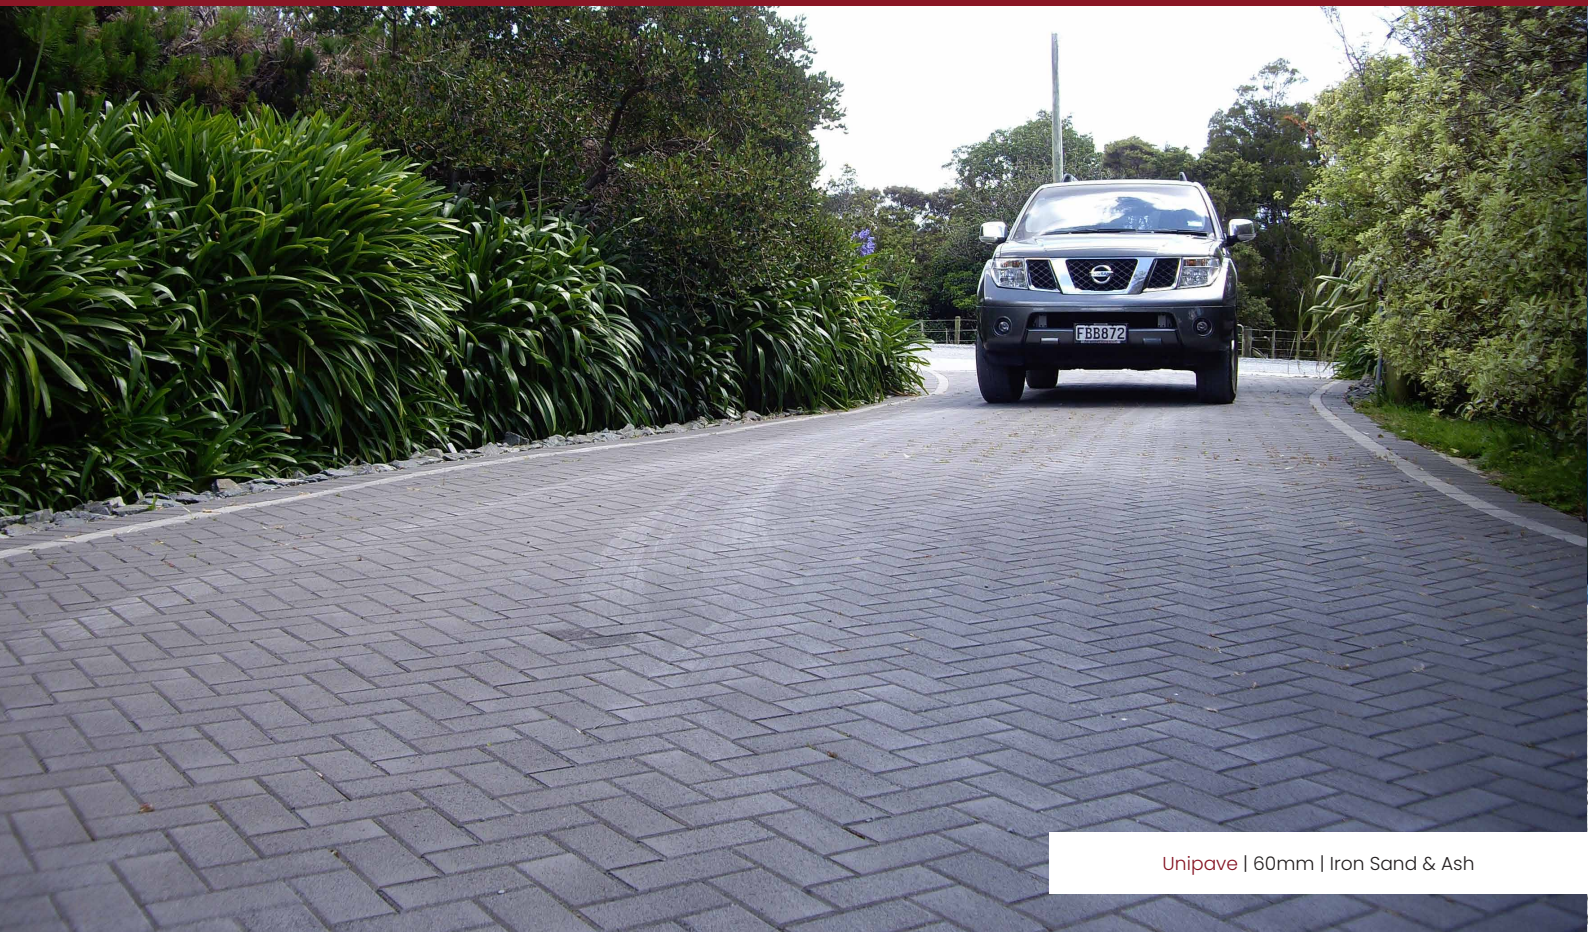

Unipave | 60mm | Iron Sand & Ash



Courtyard | 60mm | Black Magic
Unipave | 60mm | White



Beautify your world...




Aquaflow | 60mm | Iron Stone




Courtyard | 60mm | Iron Sand
Unipave | 60mm | Ash

DUE TO THE PRINTING PROCESS, SOME VARIATIONS IN COLOUR AND SHADING MAY ACCUR. PLEASE BE SURE TO CHOOSE FROM REAL SAMPLES AND COMPLETED PROJECTS! PLEASE READ THE GENERAL INFORMATION AT BACK OF THE BROCHURE. A PRODUCT INSTALLED / LAID IS DEEMED TO BE ACCEPTED. IMPORTANT NOTE: PLEASE VISIT OUR WEBSITE FOR THE VERY LATEST / UP TO DATE INFORMATION..

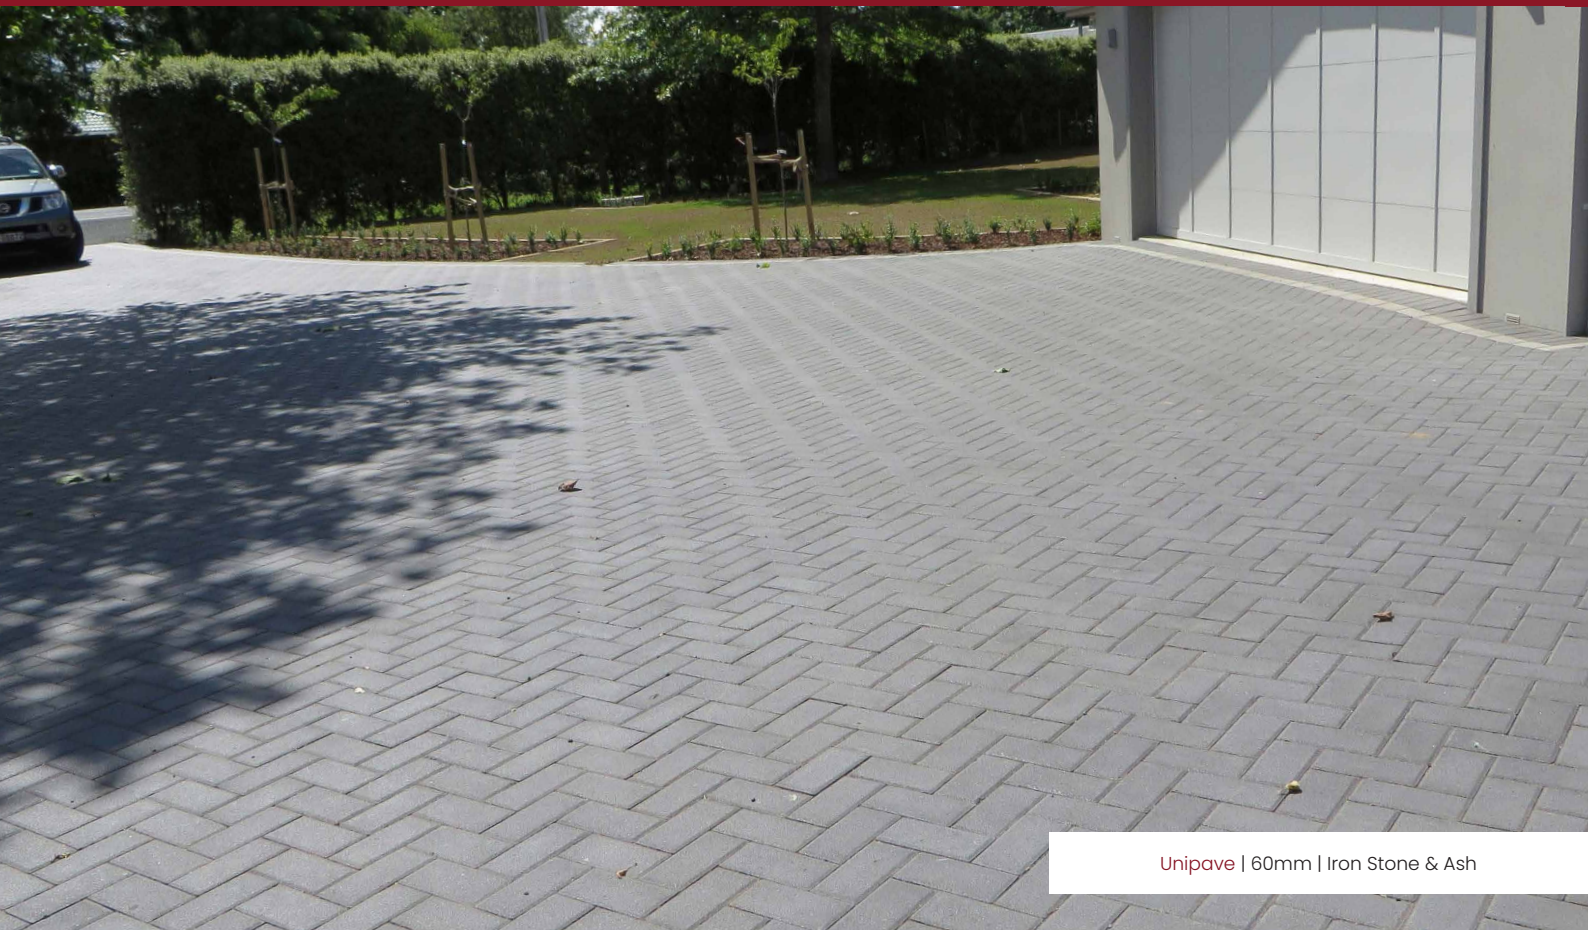

Unipave | 60mm | Iron Stone & Ash

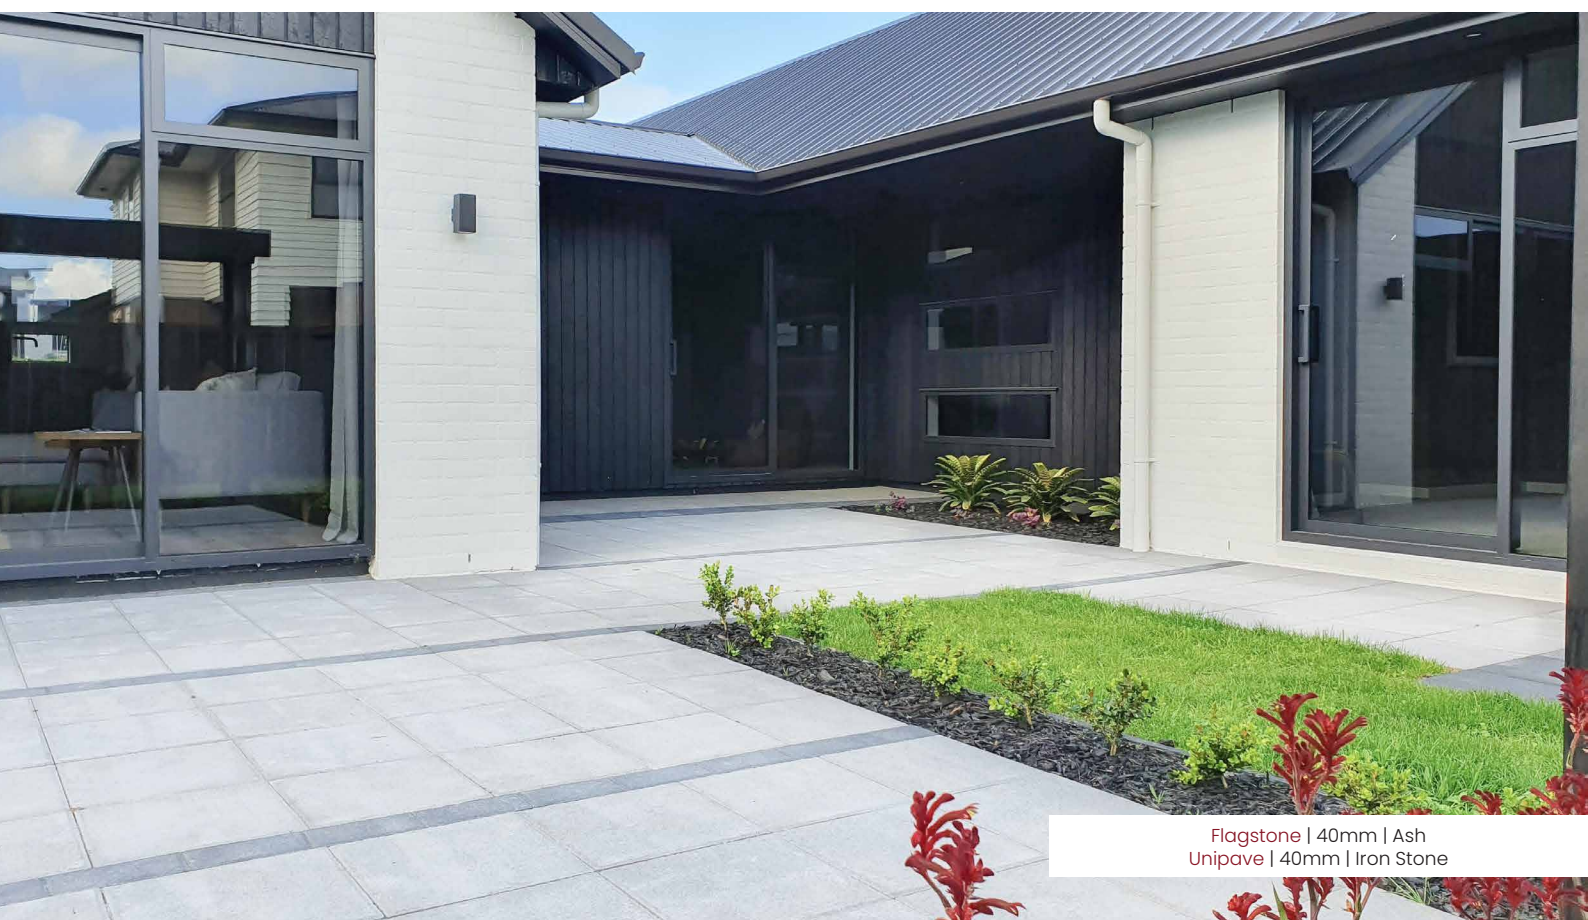

Flagstone | 40mm | Ash
Unipave | 40mm | Iron Stone



Beautify your world...



PREMIER-ACID-WASH


When pavers, concrete or bricks lose their original beauty and dirt becomes embedded in the surface and before you seal your patio or driveway for the first time, it is necessary to acid wash your product. PREMIER-ACID-WASH makes this process simple and easy with clear instructions to follow. Acid wash will restore your pavers, concrete or bricks to their former glory.

Available in 5 litre container.



PREMIER-WHITE-CEMENT

Premier White Cement is a high quality, high strength multi-purpose white cement. This cement is best used for mortar matching lighter colour products such as Premier Bricks or Premier Pavers. For optimum colour consistency use in conjunction with the Premier Washed Sand. AVAILABLE IN 20KG BAGS.



PREMIER-SWEEP-IN-GROUT

Hardens with moisture (DRYCAST PAVERS ONLY)

Has been specifically formulated using graded washed sand and additives, to allow rapid filling of all vertical joints in segmental paving. It is a jointing material which generally conforms to guidelines set out by the clay brick and paver Institute's 'Design Manual One for Segmental Paving Units'. PREMIER-SWEEP-IN-GROUT is suitable for use in the following situations: driveways, footpaths, heavy traffic areas, sloping sites, high wind areas, roadways, airport standing areas, and surfaces where mobile vacuum sweepers are used. AVAILABLE IN 30KG BAGS.

Base Course Calculator

1 m³ = 1.6 Tonne

Example:

Area (m ²)	40.0
Thickness (m)	0.100
Volume (m ³)	4.0
Plus Compaction %	1.30
Total Volume (m ³)	5.2
Base Course Required (Tonne)	8.3

GAP20 Calculator

1 m³ = 1.48 Tonne

Example:

Area (m ²)	40.0
Thickness (m)	0.100
Volume (m ³)	4.0
Plus Compaction %	1.00
Total Volume (m ³)	4.0
Base Course Required (Tonne)	5.9

Eco Acid Wash Calculator

1 m² = 0.2 Litres

Example:

Area (m ²)	20.0
Acid Wash Required (L)	4.00
Bottle Size (L)	3.8
Total Number of Bottles	1.0

Mortar Mix Calculator

1 m² = 25kg

Example:

Area (m ²)	120
Mortar Mix Required (kg)	30.00
Bag Size (kg)	30
Total Number of Bags	10

Wetlook Sealer Calculator

1 m² = 0.1 Litres one coat

Example:

Area (m ²)	40.0
Wetlook Sealer Required (L)	4
Bottle Size (L)	3.8
Total Number of Bottles	10


Sweep in Grout Calculator

1 m² = 3kg


Example:

Area (m ²)	50.00
Sweep In Grout Required (kg)	150.00
Bag Size (kg)	30
Total Number of Bags	5.0


FOR SQUARE PAVERS ONLY

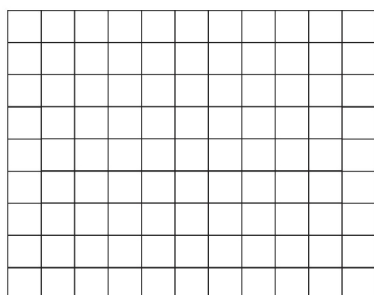


STACK BOND

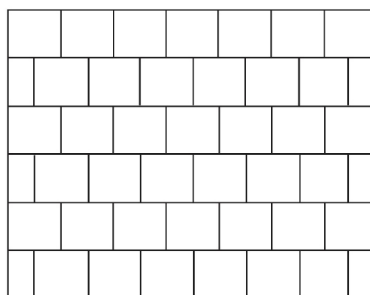


STRETCH BOND

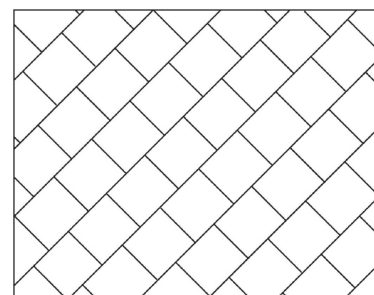


45° STRETCH BOND

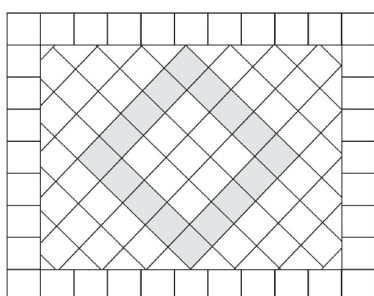

DIAMOND

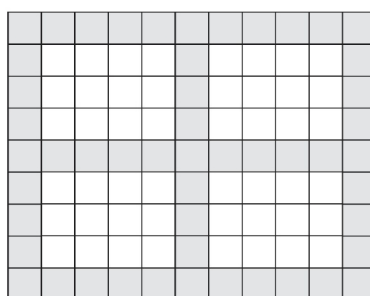


STACK BOND WITH
CONTRASTING BORDER

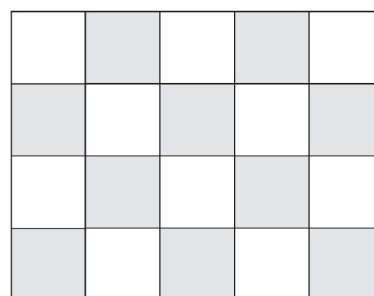


CHEQUER BOARD


FOR RECTANGULAR PAVERS ONLY

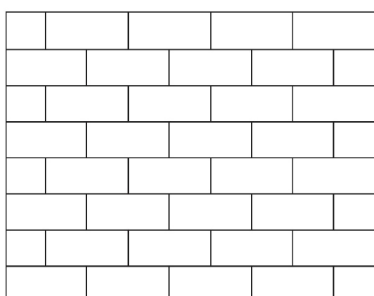


STRETCH BOND

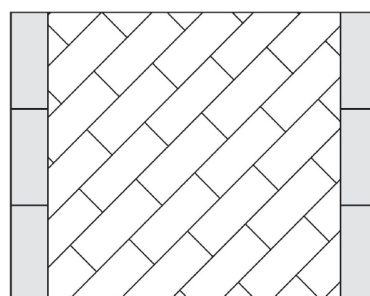


45° STRETCH BOND WITH
FLAT HEADER COURSE

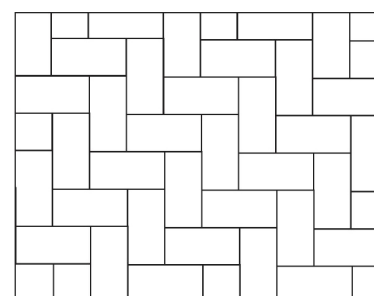


90° HERRINGBONE

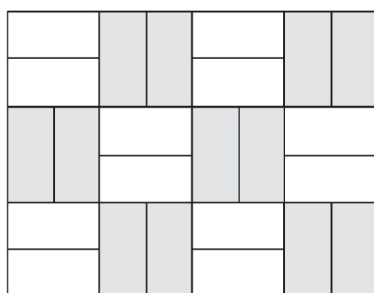

BASKET WEAVE

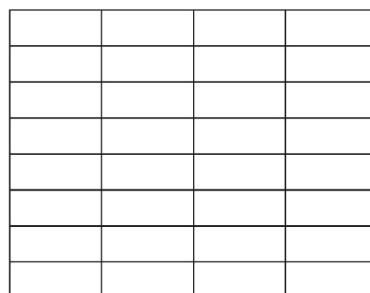

STACK BOND

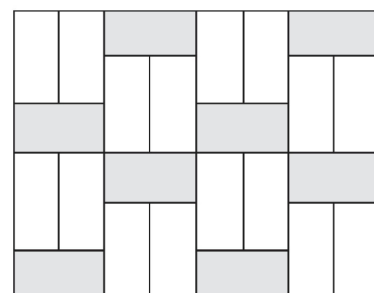

HALF BASKET WEAVE





STEP 1.

For light pedestrian use on well consolidated ground, excavate the depth of the pavers plus 50mm for the PREMIER-BASE-COURSE layer. For heavy garden equipment, vehicle traffic, hard standing or poor ground – a sub base of 150 – 200mm depth is required. The sub base should be well compacted and consist GAP-20 or similar (not larger than 25mm aggregate). Provide a fall of 10 – 15mm over every 1 metre to allow for water runoff. The falls should be away from the house or walls unless linear surface drainage channels are used. Building regulations require paving to be a minimum height below the floor level. Check your local building regulations for this information.



STEP 2.

Any area of pavers must be surrounded by a firm edge restraint to stop the blocks and sand from moving sideways. New and existing walls, kerbs or the pavers themselves laid on a suitable concrete bed can all be used to serve this purpose. Any concrete used to fix edge restraints must be allowed time to cure and gain strength before any vibration is commenced.



STEP 3.

After sub base excavation and fill (if required) screed out PREMIER-BASE-COURSE on top of the sub base within the restrained area to an approximate depth of 65mm. Then compact with a plate compactor (obtained from you local hire shop). Then spread PREMIER-WASHED-SAND over at approx 5-10mm thickness and screed off to give a firmly compacted thickness of 50mm. One tonne of PREMIER-BASE-COURSE covers approximately 8m².



STEP 4

Individual pavers are then simply placed onto the sand bed and according to the pattern, laying progresses from a corner or long edge and should proceed along one laying face until work is finalised. Pavers from several packs should be well mixed to enhance colour blending.



STEP 5.

Cutting of pavers may be required to fill gaps between edge restraints. This may be done using a hammer and bolster chisel. If a lot of cutting is necessary, a mechanical block splitter or power cutter can be hired.



STEP 6.

With a stiff broom, thoroughly brush a quality joint sand over the pavers to fill the joints before compacting. For smaller areas use a rubber mallet to compact. For larger areas use a plate compactor. Carpet may be required when compacting these pavers to help prevent them from cracking. Keep sweeping PREMIER-SWEEP-IN-GROUT in until all joints are topped up. Sweep in thoroughly to avoid staining during spraying. Then spray a fine mist of water over the area to help set the grout. ONLY USE SMALL AMOUNT OF WATER

STEP 7.

To maintain a just laid look, you can seal your pavers using either PREMIER-SEALER product of your choice. Talk to your local PREMIER distributor about PREMIER-SEALER for your pavers. Unsealed paving will weather naturally making colours appear less intense.

STEP 8.

Step back – relax and enjoy the finished result.

WHAT YOU NEED: CHECKLIST

- ☐ PAVERS: Calculate required amount
- Granular fill for the sub base use:
 - ☐ PREMIER-BASE-COURSE (Bagged 1000KG)
 - ☐ PREMIER-WASHED-SAND
 - ☐ PREMIER-SWEEP-IN-GROUT
 - ☐ CEMENT ☐ BUILDERS MIX
 - ☐ Shovel, spade and rake
 - ☐ Tape measure ☐ Level
 - ☐ Stakes and stringline ☐ Gloves and earmuffs
 - ☐ Compactor ☐ Wheel barrow
 - ☐ Straight edge/screed
 - ☐ Bolster or paving saw to cut pavers

TERMS AND CONDITIONS

In the unfortunate but unlikely event of products reaching you in less than satisfactory condition, please notify the retailer immediately.

PLEASE NOTE: Whilst every effort has been made to give sound advice, Premier Group International can take no responsibility for any loss, damage or injury sustained in following it, neither can Premier Group accept any liability in respect of products being used for any purposes other than those for which they were intended by the manufacturer. Premier Group cannot accept any liability for quality of installation of pavers or interpretation of the laying guide as these procedures are beyond Premier Group control. Premier Group recommends that all products are installed by specialist approved installers.

EFFLORESCENCE

All concrete products may, in their early life, appear to lose some intensity of colour and experience a milky-white stain on the face of the product. This is efflorescence staining. It is a temporary phenomenon and is in no way detrimental to the performance of the material and responsibility cannot be accepted for its occurrence. Clay products may also suffer from a temporary white stain called efflorescence. This is quite different from efflorescence in concrete products and is caused by soluble salts within the clay being transported by water to the surface as they dry out. Responsibility cannot be accepted for its occurrence. For further information on efflorescence staining in both clay and concrete products, please call.

COLOUR VARIATION

The colours shown in this literature are as exact as photographic and printing processes will allow. We strongly recommend that colours are judged and chosen from actual materials rather than photographic representation depicted herein. Although every effort is made to ensure consistency of product colour, variations between production batches can occur. We therefore recommend that, when purchasing materials, especially in the case of larger quantities, they all come from the same batch and that products are thoroughly mixed onsite by drawing from a minimum of three packs. All natural stone Sandstone products vary with differing geological conditions. Such variations can lead to small particles of ironstone within the product creating a darkening of the surface during natural weathering.

MAINTENANCE

Paving materials require periodic cleaning to maintain their appearance. Regular sweeping to prevent the build-up of detritus is recommended. Light coloured blocks, whilst structurally sound for driveway use, are liable to emphasise tyre marks and oil spills on the driveway. It must be accepted that these products will need more maintenance if the overall appearance is to be maintained. Proprietary cleaning agents are widely available and details of these can be obtained through Premier Group, please phone 0800 22 22 98. Care should be taken when buying cleaning agents as some varieties contain a concentration of acid, which can adversely affect the appearance of concrete products, clay and natural stone. For general cleaning of

GENERAL CARE

Sweep regularly with a stiff bristled broom to keep free from debris. During construction, cover the paved areas to protect against damage.

Protect your pavers against possible staining from mortar, oxides, cement and rust. Do not use high pressure cleaning apparatus to clean pavers. In all cases, attempt to clean a stain before it hardens or dries.

If a stain occurs, follow some simple steps: assess type of stain carefully before taking action (incorrect assessment of stain can cause the stain to be more difficult to remove). If the stain cannot be accurately assessed, conduct a trial process on a small portion of stained area to determine most appropriate action.

HEALTH AND SAFETY

Mixing Mortar: Dry or damp cement and wet concrete/mortar can cause irritation and burns to eyes and skin. Suitable eye protection and PVC gloves should be worn when handling these materials. If contact with the skin does occur, wash off with plenty of water. If contact with eyes occurs, irrigate with plenty of water. If irritation/burning persists, seek immediate medical attention.

Cutting: The cutting of concrete, clay and stone products with high speed cutters produces dust. Inhalation of excessive amounts of dust over a long period of time may cause long-term health effects. Suitable eye protection (safety goggles) and respiratory protection (dust mask) should be used when cutting.

Manual Handling: Most of our products are heavy. Some are very heavy. Appropriate handling precautions include wearing protective gloves and footwear and obtaining assistance when moving items weighing over 20kg.

dirt and algae, vigorous brushing with a stiff yard broom with plenty of hot detergent solution (washing up liquid or non-bio washing powder), thoroughly rinsed with clean water should suffice. Repeated treatment maybe required for paved areas sited beneath trees or in permanent/near shade. In certain circumstances, prolonged contact with wet leaves can result in staining of the paved area. Such contact should be avoided where ever practical. Certain common garden chemicals such as Ferrous Sulphate can stain paving. Please check the information given on the container holding the chemical. If chemicals are spilt on the paving remove immediately by rinsing away with clean water.

Power-washing with high pressure equipment is not normally required. Should these methods be employed, the following precautions should be observed:

1. Paving should be thoroughly swept to remove detritus (loose debris) that could act as an abrasive agent when moved by the force of a power jet.
2. A trial area should be tested before larger scale power-washing takes place.
3. No more than a medium pressure should be applied when washing paving.
4. The power-washing lance should be held at an oblique angle to the paving and at least 200mm (8") from the surface.
5. If excess sand is washed from the joints during the washing exercise, it is important that the joints are re-sanded with similar materials upon completion.
6. If mortar joints between pavers are damaged during power washing they should be re-pointed/made good with fresh pointing as required, to maintain the integrity of the paving.

SUITABILITY / APPLICATION

The paving flags illustrated in this literature are primarily intended for domestic/landscape use only. Paving flags suitable for areas subject to intense foot traffic, i.e. pedestrian precincts and commercial applications, etc are detailed in separate literature. This literature is available on request by telephoning 0800 22 22 98. For areas subject to vehicular overrun (driveways, parking areas, etc), block paving products are recommended. The block paving products illustrated in this literature are intended for pedestrian and light vehicular overrun applications (driveways and similar). For pavements subject to frequent overrun of heavy vehicles, block paving from our commercial/specification range should be used. These are detailed in separate literature, copies of which are available on request by phoning 0800 22 22 98.

STAIN REMOVAL GUIDE	
PROBLEM	SUGGESTED CLEANING METHOD
Efflorescence* (white powdery deposit)	Brush first with a stiff bristled broom. Then hose with clean water. If this doesn't work - wash with PREMIER-ACID-WASH as per label instructions. Weathering will eventually stop process from occurring
Leaves, Bark, Algae, Food and Wine Stains	Use 10 part water to 1 part bleach, then wash down
Chewing Gum	Freeze with dry ice and remove with a spatula
Ivy Suckers	Apply a heat gun to the suckers until they go hard. Allow them to cool and dry, then scrub them off with a stiff bristled broom
Will Fertilizer Stains Go Away?	Fertilizer stains on concrete are really tough to remove. The reacted minerals aren't water soluble, which means water and scrubbing won't remove them. They're only soluble in a mild acid solution
How to Remove Fertilizer Stains from Concrete	Start with a clear white vinegar, diluted 50:50 with water, and see if that removes the stains. Hang in there - you'll need to apply the vinegar solution on the stain multiple times, scrub lightly, and then rinse. Test it on a small area first to see if it works.

*Efflorescence occurs naturally in cement based products.



Beautify your world...

PREMIER PAVERS DIMENSIONS POLICY

ITALIA RANGE & TRUESTONE RANGE

All dimensions given are nominal and subject to manufacturing tolerances. The quoted dimensions of our paving ranges are those normally attained when the slabs are arranged correctly spaced, i.e. sizes are given inclusive of joints, which are typically 10mm. This policy enables you to simply plan the area covered and quantities required for your project without having to calculate a separate allowance for joint widths. Avoiding the complication of joint measurements is particularly helpful when planning random layouts. If precise dimensions are crucial, confirm the actual sizes and tolerances by measuring several samples of the product at your local stockist. Our policy is continuous innovation and product improvement. We therefore reserve the right to vary designs and specifications without notice.

WEATHERING

It should be appreciated that with all products, natural curing, weathering and site conditions can cause shade variation to appear across the surface of individual paving units. This does not in any way affect the performance of the paving and any such variation will diminish over a period of time as the paving matures. Both natural stone and concrete products are affected by the action of sunlight and rainfall over time.

PREMIER PAVERS 10 YEAR WARRANTY

Premier Group warrant that Premier Pavers will not break up and that the surface will not wear away unusually fast within 10 years from date of purchase. Any liability for product failure that may arise will be limited to repair or replacement of the defective product and will only apply for the benefit of the original purchase. Premier Group will not be liable for any consequential loss or damage, or transport charges.

THE WARRANTY IS CONDITIONAL ON:

1. Construction, installation and maintenance being carried out as specified in the Premier Paver Manual/Brochure/Website. In the case of wetcast paving (Italia range) this means paving MUST be laid using the recommended 5 spot mortar method.
2. Warranty certificate being returned to the manufacturer within 21 days of purchase together with proof of purchase.

THIS WARRANTY DOES NOT COVER THE FOLLOWING:

1. Sealers, grouts or mortar. This includes any issues that may arise relating to or resulting from the application of sealers, grouts and mortars.
2. Normal wear and tear, damage by impact or acts of God.
3. Situations where the Pavers have been subject to exposure to chemicals, water blasters or other corrosion causing products (see Premier Pavers Maintenance info for guidelines).
4. Unsuitable use of the product: e.g. used as Bricks.
5. Batching and natural colour variations.
6. Efflorescence: All cement based products are subject to this natural phenomenon. It can appear to "whiten" or fade the product. It will gradually diminish over time or you can choose to acid wash and seal with Premier Products.
7. Colour: Premier products are manufactured from natural materials for natural results. Colour variation is normal and is part of the natural beauty of the product.
8. For wetcast pavers (Italia range) Thickness variations. (Thickness variation is a non-issue if laid using the recommended 5 spot mortar method).
9. All natural variations as explained in the following statements.

POINTING

We recommend that PREMIER-SWEEP-IN-GROUT (for Lifestyle Range) is used to fill pavings joints and should be completed within a few days of laying. This will provide a more permanent finish and ensure maximum surface drainage. It should be recognised that poor drainage (which includes the sub-base design) may result in water retention which can affect the weathering characteristics of a paved area.

*For wetcast pavers and Truestone use Premier's resin based grout compound P75. Application instruction and video tutorial are available.

SALES TERMS AND CONDITIONS

Your signature on the freight docket is confirmation that the stock has been received in good condition. Credits cannot be issued where freight dockets have been signed.

IMPORTANT NOTICE

PRODUCT LAID IS DEEMED TO BE ACCEPTED



It is important to understand that Premier Group Products are created from natural materials to achieve a natural look. This means that every Premier product captures nature's variety and beauty and any variations you see will not affect the performance of the product but rather will enhance a natural, weathered stone appearance. Natural variations as explained in the order confirmation and our brochure include: Colour variations, small chipping and texture variations including hairline fissures, crazing and texture variations typical of stone based materials. Any variations from the samples you have seen ensure your paving project is unique and special to your property.

CAUTION! To prevent marking - keep pavers stacked straight and dry until laid!! DO NOT use polystyrene as spacers!!

QUALITY: If for some reason, you are not completely satisfied with the quality of the product, please contact us immediately. We will not accept any claims for labour costs to remove or relay products that have been installed. Our warranty is limited to free replacement of product, deemed to be unsatisfactory by us, before installation takes place. Terms and conditions apply.

DID YOU KNOW?

WE ALSO HAVE THESE BEAUTIFUL PRODUCTS...

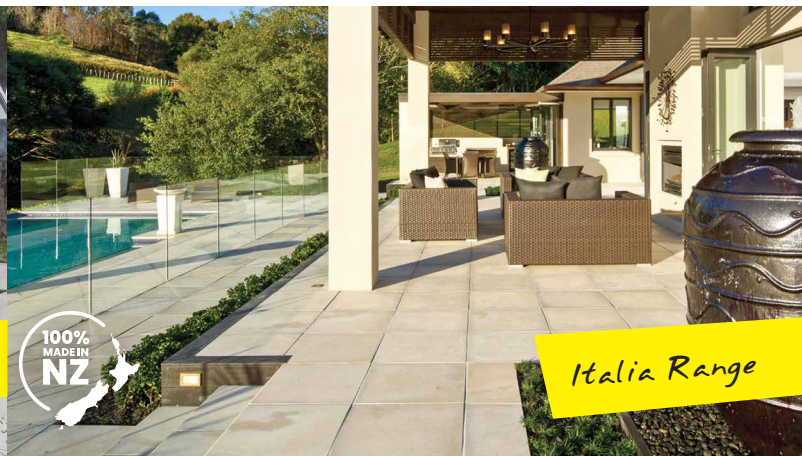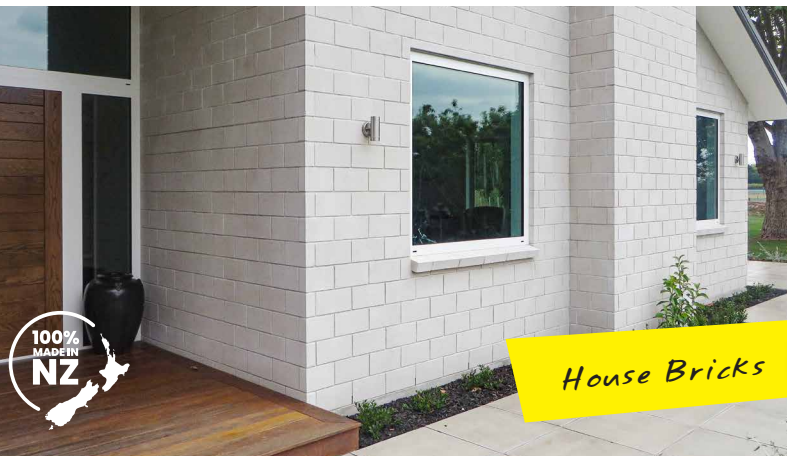

Call now for FREE quotes or advice!

0800 22 22 98

visit us at www.premier-group.nz

email us at info@premier-group.co.nz

PREMIER GROUP NEW ZEALAND

Head Office Te Rapa, Hamilton, New Zealand

Postal Address PO Box 12172, Hamilton 3248, New Zealand